




CL-SFP28_SR CPRI
25Gb/s 100m SFP28 Transceiver
RoHS 6 compliant

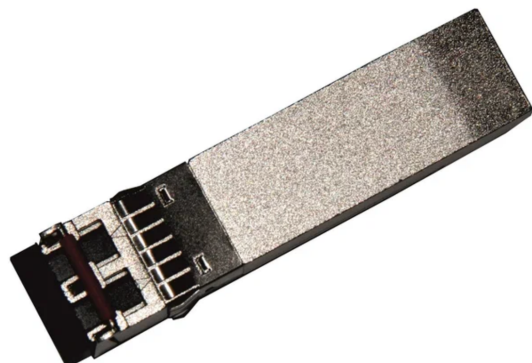

Features

- UP to 25.78Gb/s bit rates
- 25GE SR/eCPRI
- CPRI option 10
- Hot-Pluggable SFP28 footprint
- Duplex LC connector
- 850nm VCSEL transmitter, PIN photo-detector
- Up to 100m on OM4 MMF, 70m on OM3 MMF
- 2-wire interface for management specifications compliant with SFF 8472 digital diagnostic monitoring interface for optical transceivers
- Cost effective SFP28 solution, enables higher port densities and greater bandwidth
- Power Supply :+3.3V
- Low Power consumption<1W
- Operating case temperature Range:
 - Commercial: -5~ 70°C
- RoHS compliant

Applications

- High-speed storage area networks
- Computer cluster cross-connect
- Custom high-speed data pipes
- Inter Rack Connection

PART NUMBER	Monitor	INPUT/OUTPUT	SIGNAL DETECT	TEMPERATURE
CL-SFP28_SR CPRI	X	AC/AC	TTL	-5°C to 70 °C
CL-SFP28_SR CPRIi	X	AC/AC	TTL	-40°C to 85 °C



CL-SFP28_SR CPRI
25Gb/s 100m SFP28 Transceiver
RoHS 6 compliant

Description:

Carelink's CL Dis a very compact optical transceiver module converts 25Gbit/s serial PECL or CML electrical data into serial optical data compliant with the 25GBASE-SR standard. The SFP28 SR module electrical interface is compliant to CEI electrical specifications. The VCSEL transmitter and PIN receiver provide superior performance for Ethernet applications at up to 100m link on OM4 MMF.

The SFP28 Module compliant with SFF-8431, SFF-8432 and IEEE 802.3 by 25GBASE-SR. Digital diagnostics functions are available via a 2-wire serial interface, as specified in SFF-8472.

The fully SFP28 compliant form factor provides hot pluggability, easy optical port upgrades and low EMI emission.

Absolute Maximum Ratings

Parameter	Symbol	Min.	Typical	Max.	Unit	
Storage Temperature	T _s	-40		+85	°C	
Case Operating Temperature	T _c	-5		70	°C	
Maximum Supply Voltage	V _{cc}	0		3.6	V	
Relative Humidity	RH	5		95	%	

Electrical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Supply Voltage	V _{cc}	3.135		3.465	V	
Supply Current	I _{cc}			290	mA	
Power Consumption	P			1	W	
Data Rate	R	-	25.78		Gb/s	
Transmitter Section:						
Input differential impedance	R _{in}		100		Ω	1
Tx Input Single Ended DC Voltage Tolerance (Ref V _{eeT})	V	-0.3		4	V	
Differential input voltage swing	V _{in,pp}	200		900	mV	2
Transmit Disable Voltage	V _D	2		V _{cc}	V	3
Transmit Enable Voltage	V _{EN}	V _{ee}		V _{ee} +0.8	V	
Receiver Section:						
Single Ended Output Voltage Tolerance	V	-0.3		4	V	
Rx Output Diff Voltage	V _o	300		900	mV	



CL-SFP28_SR CPRI
25Gb/s 100m SFP28 Transceiver
RoHS 6 compliant

Rx Output Rise and Fall Time	Tr/Tf	9.5			ps	4
LOS Fault	V _{LOS fault}	2		V _{CCHOST}	V	5
LOS Normal	V _{LOS norm}	V _{ee}		V _{ee} +0.8	V	5

Note:

1. Connected directly to TX data input pins. AC coupling from pins into laser driver IC.
2. Per SFF-8431 Rev 3.0
3. Into 100 ohms differential termination.
4. 20%~80%
5. LOS is an open collector output. Should be pulled up with 4.7k – 10kΩ on the host board. Normal operation is logic 0; loss of signal is logic 1. Maximum pull-up voltage is 5.5V.

Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Transmitter Section:						
Center Wavelength	λ_t	840	850	860	nm	
spectral width	$\Delta\lambda$			1	nm	
Average Optical Power	P _{avg}	-7.0		+2.4	dBm	
Optical Power OMA	P _{oma}	-6.4	-1.5	3	dBm	
Laser Off Power	P _{off}			-30	dBm	
Extinction Ratio	ER	2.0			dB	
Receiver Section:						
Center Wavelength	λ_r	840	850	860	nm	
Receiver Sensitivity(OMA)	Sen			-10.3	dBm	1
Los Assert	LOS _A	-30		-	dBm	
Los Dessert	LOS _D			-12.3	dBm	
Los Hysteresis	LOS _H	0.5		5	dB	
Overload	Sat	3.5			dBm	

Note:


1. Measured with a PRBS 2³¹-1 test pattern, @25.78Gb/s, BER<5E-5.



CL-SFP28_SR CPRI
25Gb/s 100m SFP28 Transceiver
RoHS 6 compliant

Pin Assignment

Diagram of Host Board Connector Block Pin Numbers and Name

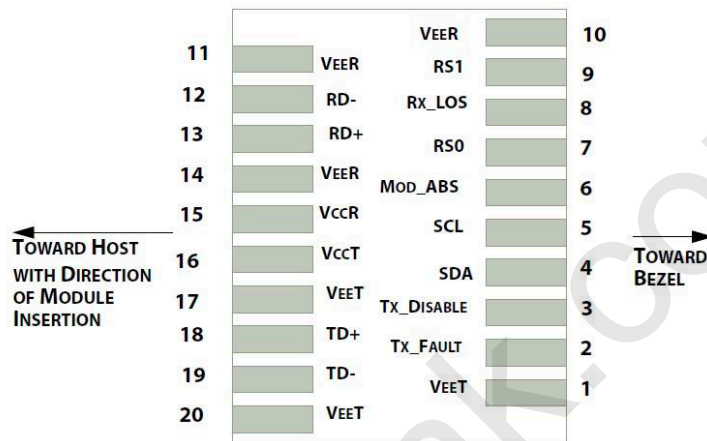

Pin Function Definitions

PIN #	Name	Function	Notes
1	VeeT	Module transmitter ground	1
2	Tx Fault	Module transmitter fault	2
3	Tx Disable	Transmitter Disable; Turns off transmitter laser output	3
4	SDL	2 wire serial interface data input/output (SDA)	4
5	SCL	2 wire serial interface clock input (SCL)	4
6	MOD-ABS	Module Absent, connect to VeeR or VeeT in the module	2
7	RS0	Rate select0, optionally control SFP+ receiver.	
8	LOS	Receiver Loss of Signal Indication	
9	RS1	Rate select0, optionally control SFP+ transmitter.	
10	VeeR	Module receiver ground	1
11	VeeR	Module receiver ground	1
12	RD-	Receiver inverted data out put	
13	RD+	Receiver non-inverted data out put	
14	VeeR	Module receiver ground	1
15	VccR	Module receiver 3.3V supply	
16	VccT	Module transmitter 3.3V supply	
17	VeeT	Module transmitter ground	1
18	TD+	Transmitter non-inverted data out put	
19	TD-	Transmitter inverted data out put	
20	VeeT	Module transmitter ground	1




CL-SFP28_SR CPRI
25Gb/s 100m SFP28 Transceiver
RoHS 6 compliant

Note:

1. The module ground pins shall be isolated from the module case.
2. This pin is an open collector/drain output pin and shall be pulled up with 4.7K-10Kohms to Host_Vcc on the host board.
3. This pin shall be pulled up with 4.7K-10Kohms to VccT in the module.
4. This pin is an open collector/drain output pin and shall be pulled up with 4.7K-10Kohms to Host_Vcc on the host board.

Transceiver Block Diagram

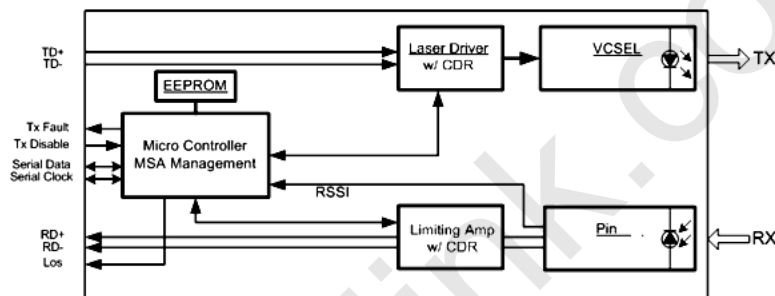

SFP28 Module EEPROM Information and Management

The SFP28 modules implement the 2-wire serial communication protocol as defined in the SFF-8472. The serial ID information of the SFP modules and Digital Diagnostic Monitor parameters can be accessed through the I²C interface at address A0h and A2h.

The memory is mapped in Table 1.

Detailed ID information(A0h) is listed in Table 2.

And the DDM specification at address A2h.

For more details of the memory map and byte definitions, please refer to the SFF-8472, "Digital Diagnostic Monitoring Interface for Optical Transceivers". The DDM parameters have been internally calibrated.



CL-SFP28_SR CPRI
25Gb/s 100m SFP28 Transceiver
RoHS 6 compliant

Table 1.Digital Diagnostic Memory Map (Specific Data Field Descriptions)

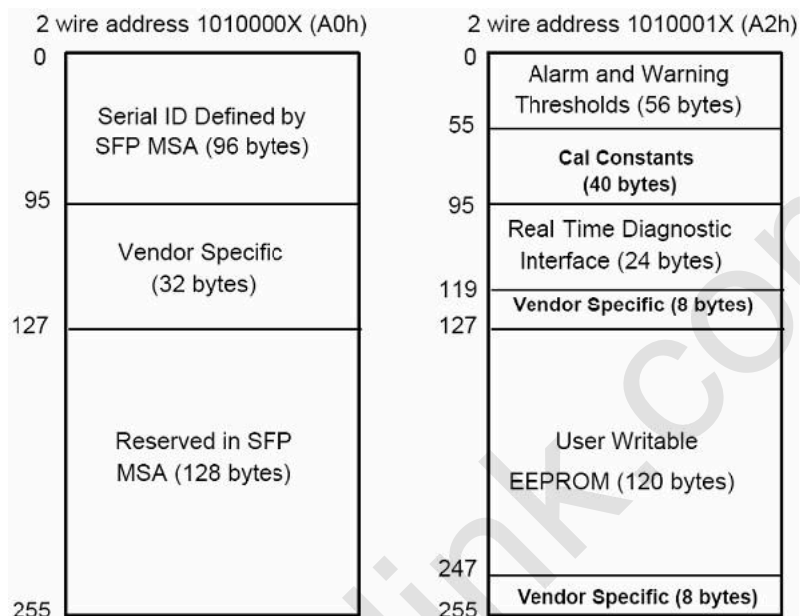


Table 2 - EEPROM Serial ID Memory Contents (A0h)

Data Address	Length (Byte)	Name of Length	Description and Contents
Base ID Fields			
0	1	Identifier	Type of Serial transceiver (03h=SFP)
1	1	Reserved	Extended identifier of type serial transceiver (04h)
2	1	Connector	Code of optical connector type (07=LC)
3-10	8	Transceiver	
11	1	Encoding	
12	1	BR, Nominal	Nominal baud rate, unit of 100Mbps
13-14	2	Reserved	(0000h)
15	1	Length(9um)	Link length supported for 9/125um fiber, units of 100m
16	1	Length(50um)	Link length supported for 50/125um fiber, units of 10m
17	1	Length(62.5um)	Link length supported for 62.5/125um fiber, units of 10m
18	1	Length(Copper)	Link length supported for copper, units of meters
19	1	Reserved	
20-35	16	Vendor Name	SFP vendor name: Carelink
36	1	Reserved	
37-39	3	Vendor OUI	SFP transceiver vendor OUI ID
40-55	16	Vendor PN	Part Number: "CLXXXX" (ASCII)
56-59	4	Vendor rev	Revision level for part number



CL-SFP28_SR CPRI
25Gb/s 100m SFP28 Transceiver
RoHS 6 compliant

60-62	3	Reserved	
63	1	CCID	Least significant byte of sum of data in address 0-62
Extended ID Fields			
64-65	2	Option	Indicates which optical SFP signals are implemented (001Ah = LOS, TX_FAULT, TX_DISABLE all supported)
66	1	BR, max	Upper bit rate margin, units of %
67	1	BR, min	Lower bit rate margin, units of %
68-83	16	Vendor SN	Serial number (ASCII)
84-91	8	Date code	Carelink's Manufacturing date code
92-94	3	Reserved	
95	1	CCEX	Check code for the extended ID Fields (addresses 64 to 94)
Vendor Specific ID Fields			
96-127	32	Readable	Carelink specific data, read only
128-255	128	Reserved	Reserved for SFF-8079

Digital Diagnostic Monitor Characteristics

Data Address	Parameter	Accuracy	Unit
96-97	Transceiver Internal Temperature	±5.0	°C
98-99	VCC3 Internal Supply Voltage	±3.0	%
100-101	Laser Bias Current	±10	%
102-103	Tx Output Power	±3.0	dBm
104-105	Rx Input Power	±3.0	dBm



The CL complies with international Electromagnetic Compatibility (EMC) and international safety requirements and standards (see details in Table following).

Electrostatic Discharge (ESD) to the Electrical Pins	MIL-STD-883E Method 3015.7	Class 1(>1000 V)
Electrostatic Discharge (ESD) to the Duplex LC Receptacle	IEC 61000-4-2 GR-1089-CORE	Compatible with standards
Electromagnetic Interference (EMI)	FCC Part 15 Class B EN55022 Class B (CISPR 22B) VCCI Class B	Compatible with standards
Laser Eye Safety	FDA 21CFR 1040.10 and 1040.11 EN60950, EN (IEC) 60825-1.2	Compatible with Class 1 laser product.

SFP+ PCB_TOP

VEER
RD-
RD+
VEER
VCCR
VCCT
VEET
TD+
TD-
VEET

SFP+ PCB_BOT

VEER
RS1
RX_LOS
RS0
MOD-DEF0
SCL
SDA
TX_DIS
TX_FAULT
VEET

Host +3.3V

Host +3.3V

100ohm Diff

100ohm Diff

0.1uF, 22uF, 4.7uH, 0.1uF

0.1uF, 22uF, 4.7uH, 0.1uF


★ Open Collector Driver

Recommended High-speed Interface Circuit



CL-SFP28_SR CPRI
25Gb/s 100m SFP28 Transceiver
RoHS 6 compliant

Mechanical Dimensions

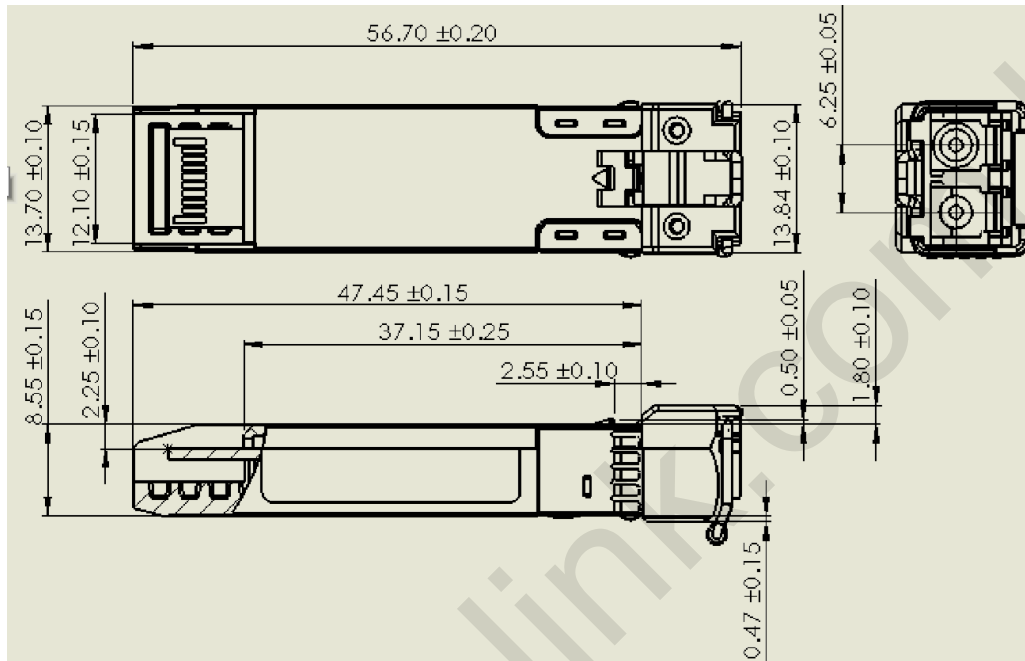

Notice:

Carelink reserves the right to make changes or discontinue any optical link product or service identified in this publication, without notice, in order to improve design and/or performance.

Applications that are described herein for any of the optical link products are for illustrative purposes only. Carelink makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.