



**RoHS 6 compliant ( Tunable XFP-DWDM)**  
**Single-mode XFP Transceiver up 80KM link budget W/I DDMI**  
**10GBASE-( Ethernet)/ Fiber channel/ SONET OC192 IR2/ SONET**  
**OC192/IR-3/SDH STM-64.2b/ SDH STM S-64.3b/ ITU-T G709**



**Features**

- Support 9.953 Gbps ( Sonet and SDH), 10.31 Gbps ( Ethernet), 10.52 Gbps ( Fiber Channel), and corresponding Forward Error Correction ( FEC) rate of 10.66/10.709/ 11.09/11.35 Gbps
- Monolithically integrated full C-band tunable transmitter
- Full Duplex LC connecto
- Comply with XFP MSA and IEEE802.3ae 10GBASE-ZR/ZW для 80км
- 50 Ghz ITU channel spacing with integrated wavelength locker
- Commercial operating temperature from -5°C to 70°C
- Maximum power dissipation of 3.5W
- No Reference clock required
- DDMI support

**Ordering Information**

PART NUMBER	INPUT/OUTPUT	MONITOR	VOLTAGE	TEMPERATURE
CL-XFP-D80-T-XX	AC/AC	Yes	3.3V	-5°C to 70 °C
CL-XFP-D80-T-XXi	AC/AC	Yes	3.3V	-40°C to 85 °C

**Absolute Maximum Ratings**

PARAMETER	SYMBOL	MIN	MAX	UNITS	NOTE
Storage Temperature	$T_s$	-40	85	°C	
Supply Voltage 1	$V_{cc3}$	-0.5	4.0	V	
Supply Voltage 2	$V_{cc5}$	-0.5	6.0	V	



**RoHS 6 compliant ( Tunable XFP-DWDM)**  
**Single-mode XFP Transceiver up 80KM link budget W/I DDMI**  
**10GBASE-( Ethernet)/ Fiber channel/ SONET OC192 IR2/ SONET**  
**OC192/IR-3/SDH STM-64.2b/ SDH STM S-64.3b/ ITU-T G709**

### Recommended Operating Conditions

PARAMETER	SYMBOL	MIN	MAX	UNITS	NOTE
Case operating Temperature	$T_c$	-5	70	°C	
Supply Voltage	$V_{cc3}$	3.1	3.5	V	
Supply Current	$I_{cc3}$	---	450	mA	
Supply Voltage	$V_{cc5}$	4.5	5.5	V	
Supply Current	$I_{cc5}$	---	400	mA	

### Transmitter Electro-optical Characteristics

$V_{cc} = 3.1 \text{ V to } 3.5 \text{ V}$   $V_{cc5} = 4.5 \text{ V to } 5.5 \text{ V}$ ,  $T_c = -5^\circ \text{C to } 70^\circ \text{C}$  ( $-40^\circ \text{C to } 85^\circ \text{C}$ )

PARAMETER	SYMBOL	MIN	TYP.	MAX	UNITS	NOTE
Operating Data Rate		9.95		11.3	Gbps	
Input Reference Clock Rate						
Output power	$P_{OUT}$	0		+3	dBm	
Extinction Ratio	$ER$	9			dB	
Center Wavelength	$\lambda_c$		ITU CHANNELS		nm	
Sidemode Supression ratio	$SSR_{min}$	30				
Relative Intensity Noise	$RIN$	---		-130	dB/Hz	
Output Eye						
Differential Input Voltage	$V_{DIFF}$	0.12		1.0		
Transmit Fault Output-Low	$TX\_FAULT_L$	0.0		0.5		
Transmit Fault Output-High	$TX\_FAULT_H$	2.4				
TX_DISABLE Assert Time	$t_{off}$	---		10	Ms	
TX_DISABLE Negate Time	$t_{on}$	---		2	Ms	
Time to initialize	$t_{init}$			300	Ms	



**RoHS 6 compliant ( Tunable XFP-DWDM)**  
**Single-mode XFP Transceiver up 80KM link budget W/I DDMI**  
**10GBASE-( Ethernet)/ Fiber channel/ SONET OC192 IR2/ SONET**  
**OC192/IR-3/SDH STM-64.2b/ SDH STM S-64.3b/ ITU-T G709**

**Receiver Electro-optical Characteristics**


$V_{cc3} = 3.1\text{ V to } 3.5\text{ V}$ ,  $V_{cc5} = 4.5\text{ V to } 5.5\text{ V}$ ,  $T_A = -5^\circ\text{C to } 70^\circ\text{C}$

PARAMETER	SYMBOL	MIN	TYP.	MAX	UNITS	NOTE
Optical Input Power-maximum	$P_{IN}$	-7				BER < 10 <sup>-12</sup>
Receiver Sensitivity	$P_{IN}$			-24	dBm	BER < 10 <sup>-12</sup>
Receiver Sensitivity (OMA)	$P_{IN}$			-22.1	dBm	BER < 10 <sup>-12</sup>
Operating Center Wavelength	$\lambda_C$	1270		1600	nm	
Receiver Reflectance	$R_{rx}$	27			dB	
Dispersion Penalty				3	dB	80 Km
Loss of Signal-Asserted	$P_A$			-30	dBm	
Loss of Signal-Deasserted	$P_D$	-22			dBm	
Differential Output Voltage	$V_{DIFF}$	0.6		0.8		
TTL Input High Voltage		2		$V_{cc}$		
TTL Input Low Voltage		0		0.8		
TTL Output High Voltage		2.		$V_{cc}$		
TTL Output Low Voltage		0		0.8		
Receiver Loss of Signal Assert Time (off to on)	$t_{A,RX\_LOS}$			100		
Receiver Loss of Signal Assert Time (on to off)	$t_{D,RX\_LOS}$			100		



RoHS 6 compliant ( Tunable XFP-DWDM)  
Single-mode XFP Transceiver up 80KM link budget W/I DDMI  
10GBASE-( Ethernet)/ Fiber channel/ SONET OC192 IR2/ SONET  
OC192/IR-3/SDH STM-64.2b/ SDH STM S-64.3b/ ITU-T G709

### Block Diagram of Transceiver

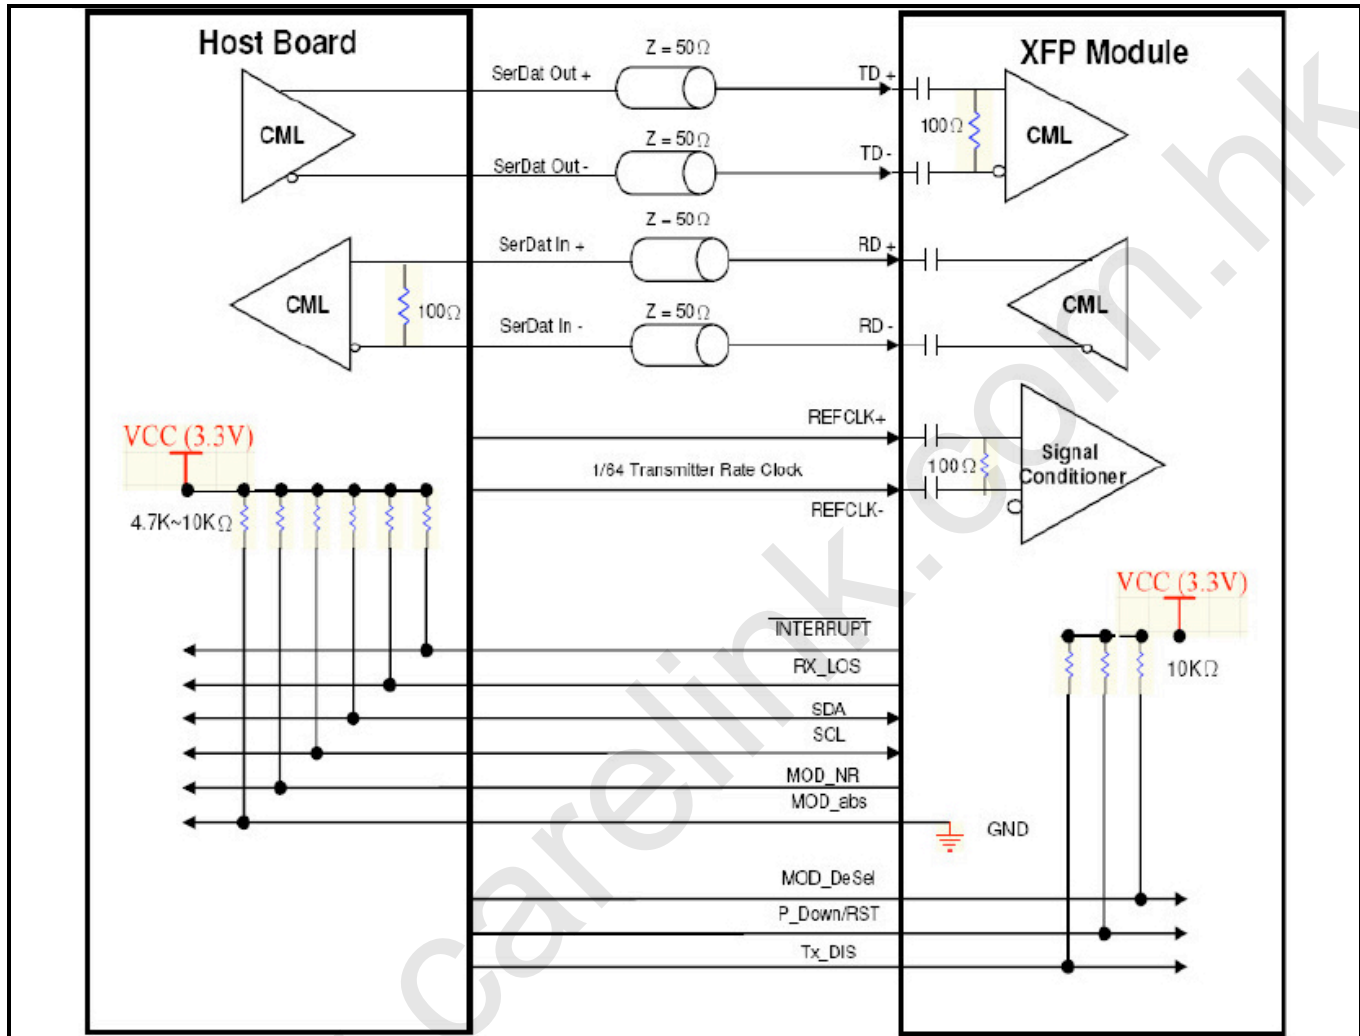

### MOD\_NR

The Mod\_NR is an output pin that when High, indicates that the module has detected a condition that renders transmitter and or receiver data invalid, shall consist of logical OR of the following signals:

- Transmit Signal Conditioner Loss of Lock
- Transmitter Laser Fault
- Receiver Signal Conditioner Loss of Lock



**RoHS 6 compliant ( Tunable XFP-DWDM)  
Single-mode XFP Transceiver up 80KM link budget W/I DDMI  
10GBASE-( Ethernet)/ Fiber channel/ SONET OC192 IR2/ SONET  
OC192/IR-3/SDH STM-64.2b/ SDH STM S-64.3b/ ITU-T G709**

---

**MOD\_DeSEL**

The Mod\_DeSel is an input pin. When held Low by the host, the module responds to 2-wire serial communication commands. The Mod\_DeSel allows the use of multiple XFP modules on a single 2-wire interface bus. When the Mod\_DeSel pin is “High”, the module shall not respond to or acknowledge any 2-wire interface communication from the host.

**INTERRUPT**

Interrupt is an output pin. When “Low”, indicates possible module operational fault or a status critical to the host system.

**TX\_DIS**

TX\_DIS is an input pin. When TX\_DIS is asserted High, the XFP module transmitter output must be turned off.

**MOD\_ABS**

Mod\_ABS is pulled up to Host\_Vcc on the host board and grounded in the XFP module. Mod\_ABS is then asserted “High” when the XFP module is physically absent from a host slot.

**RX\_LOS**

The RX\_LOS when High indicates insufficient optical power for reliable signal reception.

**P\_Down/RST**

This is a multifunction pin for module Power Down and Reset. The P\_Down/RST pin must be pulled up to VCC3 in the XFP module.


**POWER DOWN FUNCTION**

The P\_Down pin, when held High by the host, places the module in the standby (Low Power) mode with a maximum power dissipation of 1.5W. This protects hosts which are not capable of cooling higher power modules which may be accidentally inserted.



RoHS 6 compliant ( Tunable XFP-DWDM)  
Single-mode XFP Transceiver up 80KM link budget W/I DDMI  
10GBASE-( Ethernet)/ Fiber channel/ SONET OC192 IR2/ SONET  
OC192/IR-3/SDH STM-64.2b/ SDH STM S-64.3b/ ITU-T G709


### Dimensions

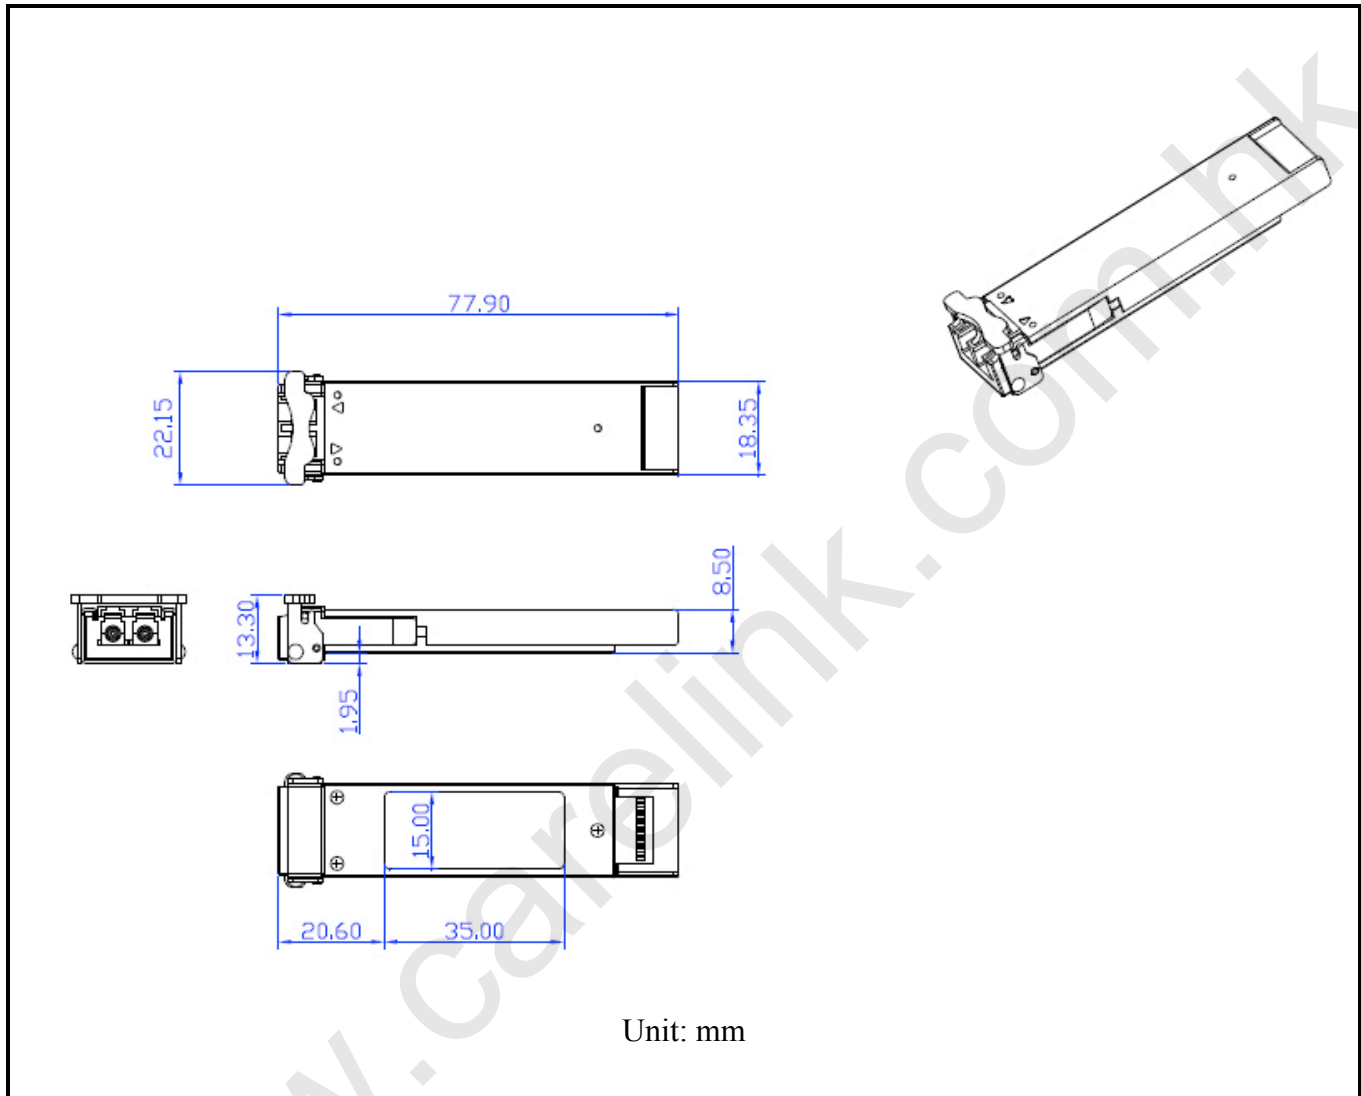



RoHS 6 compliant ( Tunable XFP-DWDM)  
 Single-mode XFP Transceiver up 80KM link budget W/I DDMI  
 10GBASE-( Ethernet)/ Fiber channel/ SONET OC192 IR2/ SONET  
 OC192/IR-3/SDH STM-64.2b/ SDH STM S-64.3b/ ITU-T G709

Pin Assignment

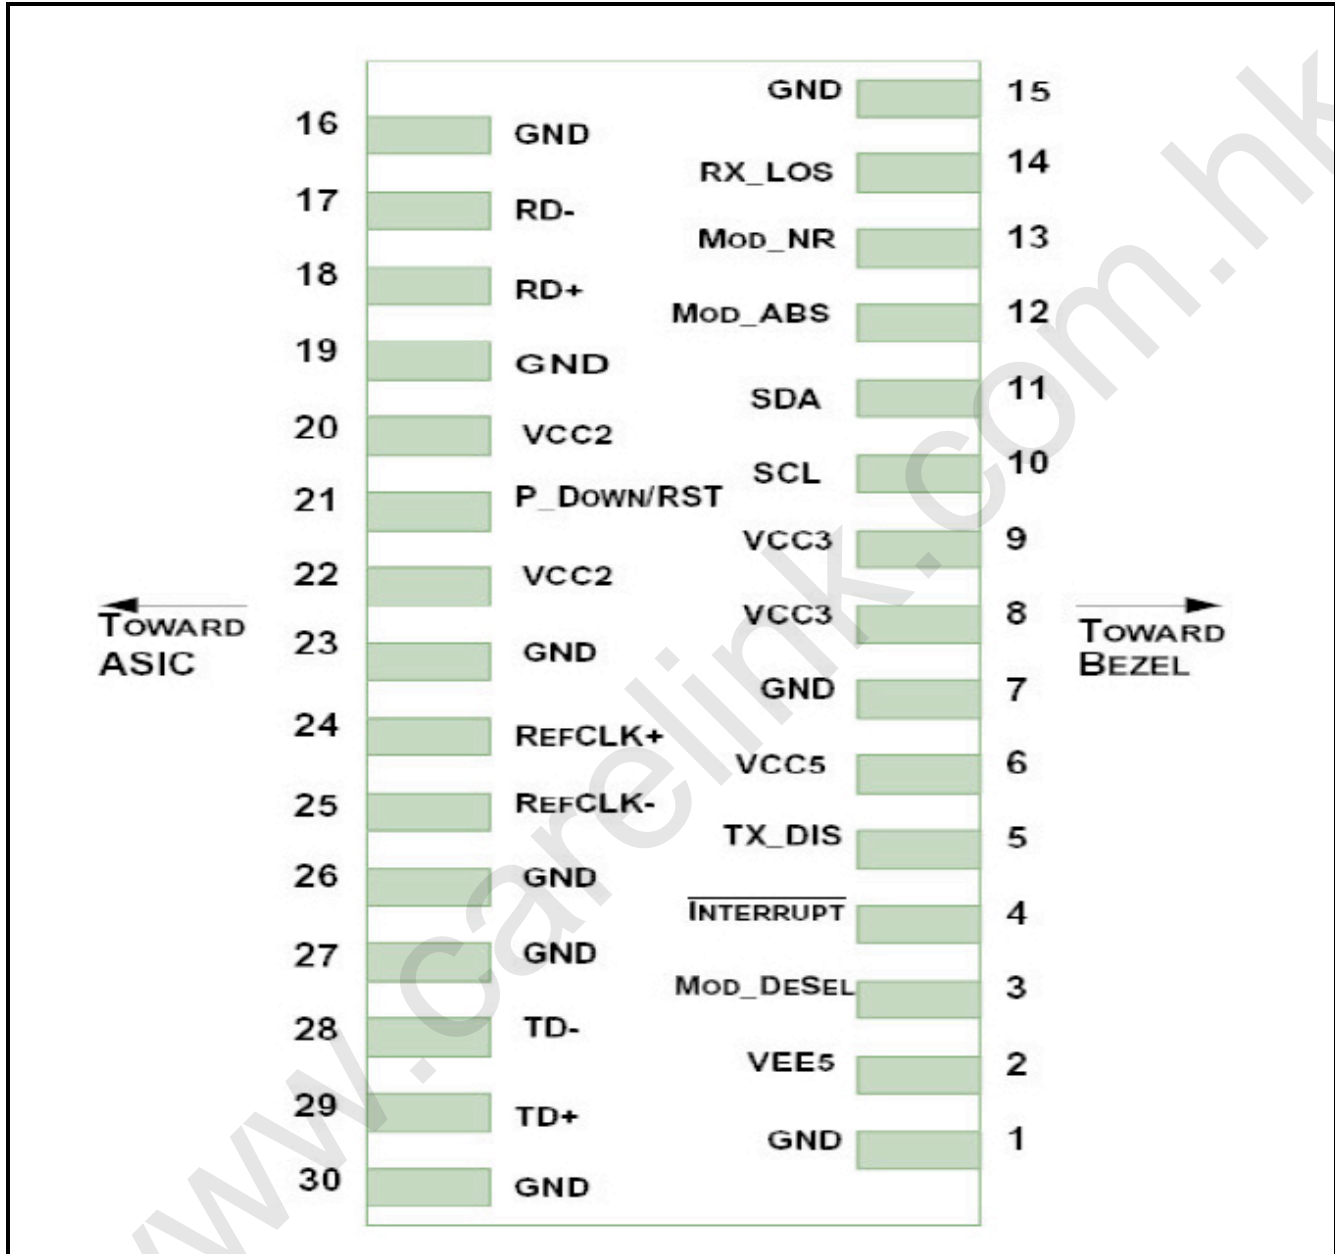



**RoHS 6 compliant ( Tunable XFP-DWDM)**  
**Single-mode XFP Transceiver up 80KM link budget W/I DDMI**  
**10GBASE-( Ethernet)/ Fiber channel/ SONET OC192 IR2/ SONET**  
**OC192/IR-3/SDH STM-64.2b/ SDH STM S-64.3b/ ITU-T G709**

---

**Eye Safety Mark**

<p>The XFP series multimode transceiver is a class 1 laser product. It complies with EN 60825-1 and FDA 21 CFR 1040.10 and 1040.11. In order to meet laser safety requirements the transceiver shall be operated within the Absolute Maximum Ratings.</p>	<p><b>Required Mark</b></p>
<p><b>Caution</b> All adjustments have been done at the factory before the shipment of the devices. No maintenance and user serviceable part is required. Tampering with and modifying the performance of the device will result in voided product warranty.</p>	<p><b>Class 1 Laser Product</b> <b>Complies with</b> <b>21 CFR 1040.10 and 1040.11</b></p>

Note : All information contained in this document is subject to change without notice.