



RoHS compliant
10G XFP CWDM Transceiver
XFP CWDM 80KM Optical Transceivers
Duplex LC,1470~1610nm, CWDM, EML, APD Receiver, Single Mode, 80km



Features

- Support multi protocol from 9.95Gb/s to 11.3Gb/s
- Hot pluggable 30 pin connector
- Compliant with XFP MSA
- Transmission distance of 80km over single mode fiber
- CWDM EML laser transmitter.
- APD Receiver
- Duplex LC connector
- 2-wire interface for management and diagnostic monitor
- XFI electrical interface with AC coupling
- Power supply voltages : +3.3V, +5V
- Temperature range: -5°C to 70°C/-30°C to 70°C/-5°C to 85°C
- Power dissipation: <3.5W
- RoHS Compliant Pa

Applications

- CWDM Networks
- OC-192/STM-64 with FEC
- SONET OC-192/SDH STM-64
- 10GBASE-ZR/ZW Ethernet
- 80km 10G Fiber Channel

Ordering Information

PART NUMBER	TX/RX	INPUT/OUTPUT	SIGNAL DETECT	TEMPERATURE	PACKAGE	Distance
CL-XFP_C80-XX		AC/AC	TTL	-5°C to 70 °C	LC SFP +	80km
CL-XFP_C80-XXe		AC/AC	TTL	-30°C to 70 °C	LC SFP +	80km
CL-XFP_C80-XXi		AC/AC	TTL	-40°C to 85 °C	LC SFP +	80km



RoHS compliant
10G XFP CWDM Transceiver
XFP CWDM 80KM Optical Transceivers
Duplex LC,1470~1610nm, CWDM, EML, APD Receiver, Single Mode,
80km

Description:

Carelink' CL_XFP_C80-XX Small Form Factor 10Gb/s (XFP) transceivers are compliant with the current XFP Multi-Source Agreement (MSA) Specification. The high performance cooled CWDM EML transmitter and high sensitivity APD receiver provide superior performance for SONET/SDH and Ethernet applications up to 80km optical links.

Specification:

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Storage Temperature	T _{ST}	-40	+85	°C
Operating Temperature	T _{IP}	-5	+70	°C
Supply Voltage 1	V _{CC3}	-0.5	+4.0	V
Supply Voltage 2	V _{CC5}	-0.5	+6.0	V

Electrical Characteristics (Condition: T_a=T_{OP})

Parameter	Symbol	Min	Typ	Max	Unit	Note
Supply Voltage 1	V _{cc5}	4.75		5.25	V	
Supply Voltage 2	V _{cc3}	3.13		3.45	V	
Supply Current – V _{cc5} supply	I _{cc5}			200	mA	
Supply Current – V _{cc3} supply	I _{cc3}			550	mA	
Module total power	P			3.5	W	
Transmitter						
Input differential impedance	R _{in}		100		Ω	1
Differential data input swing	V _{in,pp}	150		820	mV	
Transmit Disable Voltage	VD	2.0		V _{cc}	V	
Transmit Enable Voltage	VEN	GND		GND+ 0.8	V	
Transmit Disable Assert Time	T _{off}			100	ms	
Tx Enable Assert Time	T _{on}			100	ms	
Receiver						
Differential data output swing	V _{out,pp}	300	500	850	mV	
Data output rise time	tr		-	35	ps	2



RoHS compliant
10G XFP CWDM Transceiver
XFP CWDM 80KM Optical Transceivers
Duplex LC,1470~1610nm, CWDM, EML, APD Receiver, Single Mode,
80km

Data output fall time	tf		-	35	ps	2
LOS Fault	VLOS fault	Vcc – 0.5		Vcc _{HOST}	V	3
LOS Normal	VLOS norm	GND		GND+0.5	V	3
Power Supply Rejection	PSR	See Note 4 below				4

Notes : _

1. After internal AC coupling.
2. 20 – 80 %
3. Loss Of Signal is open collector to be pulled up with a 4.7k – 10kohm resistor to 3.15 – 3.6V. Logic 0 indicates normal operation; logic 1 indicates no signal detected.
4. Per Section 2.7.1. in the XFP MSA Specification.

Optical Characteristics (Condition: T_a=T_{OP})

Parameter	Symbol	Min	Typ	Max	Unit	Ref.
Transmitter						
Operating Data Rate	BR	9.95		11.3	Gb/s	
Bit Error Rate	BER			10 ⁻¹²		
Maximum Launch Power	P _{MAX}	0		+4	dBm	1
Optical Wavelength	λ	λ-6.5		λ+6.5	nm	
Optical Extinction Ratio	ER	8.2			dB	
Spectral Width	Δλ			1	nm	
Side Mode Suppression ratio	SMSR _{min}	30			dB	
Rise/Fall Time (20%~80%)	Tr/Tf			35	ps	
Average Launch power of OFF Transmitter	P _{OFF}			-30	dBm	
Tx Jitter	Txj	Compliant with each standard requirements				
Optical Eye Mask		IEEE802.3ae				2
Receiver						
Operating Data Rate	BR	9.95		11.3	Gb/s	
Receiver Sensitivity	Sen			-23	dBm	2
Maximum Input Power	P _{MAX}	-7			dBm	2
Optical Center Wavelength	λ _c	1260		1600	nm	
Receiver Reflectance	R _{rx}			-27	dB	
LOS De-Assert	LOS _D			-25	dBm	
LOS Assert	LOS _A	-34			dBm	
LOS Hysteresis	LOSH	0.5		5	dB	




RoHS compliant
10G XFP CWDM Transceiver
XFP CWDM 80KM Optical Transceivers
Duplex LC,1470~1610nm, CWDM, EML, APD Receiver, Single Mode,
80km


Notes:

1. The optical power is launched into SMF.
2. Measured with a PRBS 2₃₁-1 test pattern @10.3125Gbps BER<10⁻¹².

Pin Assignment:

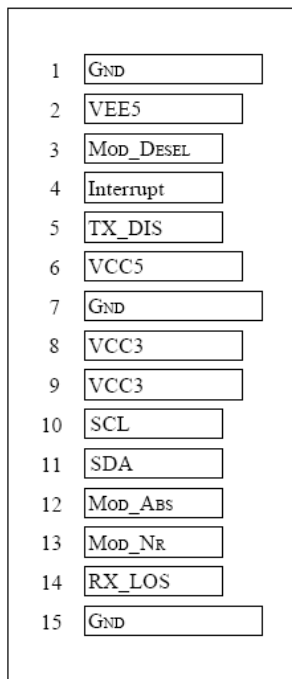

Bottom of Board
 (As view through top of board)

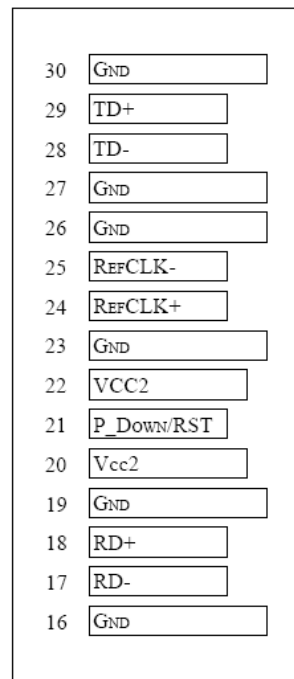

Top of Board

Diagram of Host Board Connector Block Pin Numbers and Name

Pin Description:

Pin	Logic	Symbol	Name/Description	Ref.
1		GND	Module Ground	1
2		VEE5	Optional -5.2 Power Supply – Not required	
3	LVTTL-I	Mod-Desel	Module De-select; When held low allows the module to respond to 2-wire serial interface commands	
4	LVTTL-O	Interrupt	Interrupt (bar); Indicates presence of an important condition which can be read over the serial 2-wire interface	2
5	LVTTL-I	TX_DIS	Transmitter Disable; Transmitter laser source turned off	
6		VCC5	+5 Power Supply	
7		GND	Module Ground	1



RoHS compliant
10G XFP CWDM Transceiver
XFP CWDM 80KM Optical Transceivers
Duplex LC,1470~1610nm, CWDM, EML, APD Receiver, Single Mode,
80km

8		VCC3	+3.3V Power Supply	
9		VCC3	+3.3V Power Supply	
10	LVTTL-I	SCL	Serial 2-wire interface clock	2
11	LVTTL-I/O	SDA	Serial 2-wire interface data line	2
12	LVTTL-O	Mod_Abs	Module Absent; Indicates module is not present. Grounded in the module.	2
13	LVTTL-O	Mod_NR	Module Not Ready;	2
14	LVTTL-O	RX_LOS	Receiver Loss of Signal indicator	2
15		GND	Module Ground	1
16		GND	Module Ground	1
17	CML-O	RD-	Receiver inverted data output	
18	CML-O	RD+	Receiver non-inverted data output	
19		GND	Module Ground	1
20		VCC2	+1.8V Power Supply – Not required	
			Power Down; When high, places the module in the low power stand-by mode and on the falling edge of P_Down	
			Reset; The falling edge initiates a complete reset of the module including the 2-wire serial interface, equivalent to a	
22		VCC2	+1.8V Power Supply – Not required	
23		GND	Module Ground	1
24	PECL-I	RefCLK+	Reference Clock non-inverted input, AC coupled on the host board – Not required	3
25	PECL-I	RefCLK-	Reference Clock inverted input, AC coupled on the host board	3
26		GND	Module Ground	1
27		GND	Module Ground	1
28	CML-I	TD-	Transmitter inverted data input	
29	CML-I	TD+	Transmitter non-inverted data input	
30		GND	Module Ground	1

Note

1. Module circuit ground is isolated from module chassis ground within the module.
2. Open collector; should be pulled up with 4.7k – 10k ohms on host board to a voltage between 3.15V and 3.6V.



RoHS compliant
10G XFP CWDM Transceiver
XFP CWDM 80KM Optical Transceivers
Duplex LC,1470~1610nm, CWDM, EML, APD Receiver, Single Mode,
80km

3. A Reference Clock input is not required .

Digital Diagnostic Functions:


As defined by the XFP MSA 1 , Carelink’s XFP transceivers provide digital diagnostic functions via a 2-wire serial interface, which allows real-time access to the following operating parameters:

- ✓ Transceiver temperature
- ✓ Laser bias current
- ✓ Transmitted optical power
- ✓ Received optical power
- ✓ Transceiver supply voltage

It also provides a sophisticated system of alarm and warning flags, which may be used to alert end-users when particular operating parameters are outside of a factory-set normal range.

The operating and diagnostics information is monitored and reported by a Digital Diagnostics Transceiver Controller (DDTC) inside the transceiver, which is accessed through the 2-wire serial interface. When the serial protocol is activated, the serial clock signal (SCL pin) is generated by the host. The positive edge clocks data into the XFP transceiver into those segments of its memory map that are not write-protected. The negative edge clocks data from the XFP transceiver. The serial data signal (SDA pin) is bi-directional for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end of serial protocol activation. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially. The 2-wire serial interface provides sequential or random access to the 8 bit parameters, addressed from 000h to the maximum address of the memory.


For more detailed information including memory map definitions, please see the XFP MSA Specification.

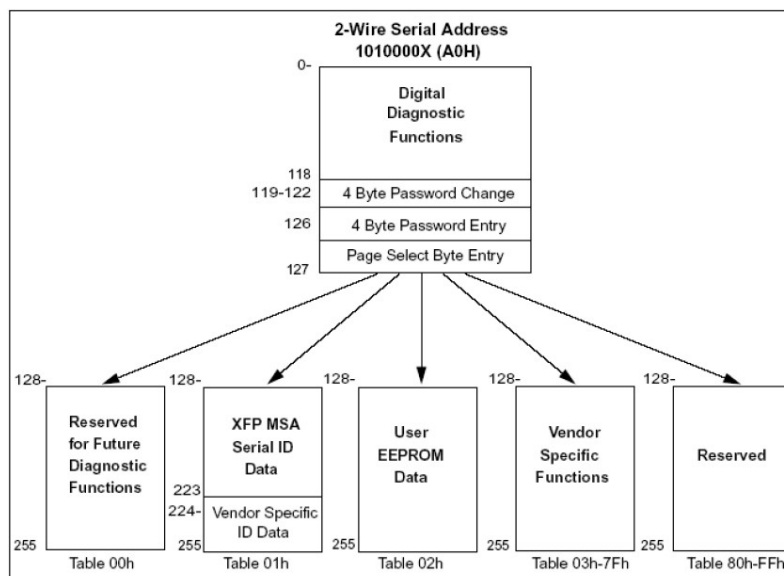




RoHS compliant
10G XFP CWDM Transceiver
XFP CWDM 80KM Optical Transceivers
Duplex LC,1470~1610nm, CWDM, EML, APD Receiver, Single Mode, 80km

Recommended Circuit:

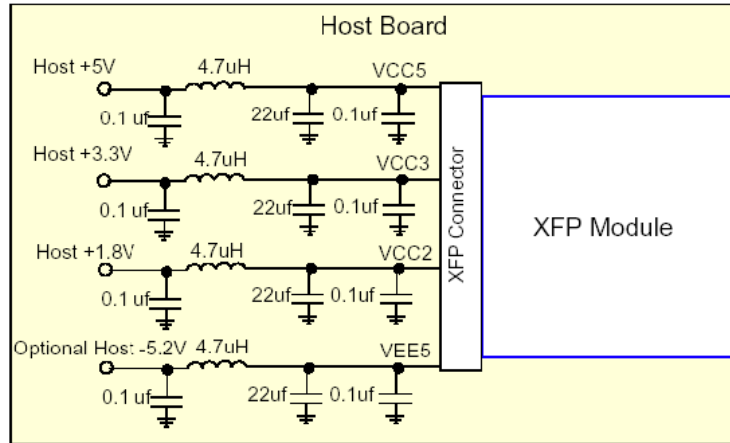

Recommended Host Board Power Supply Circuit

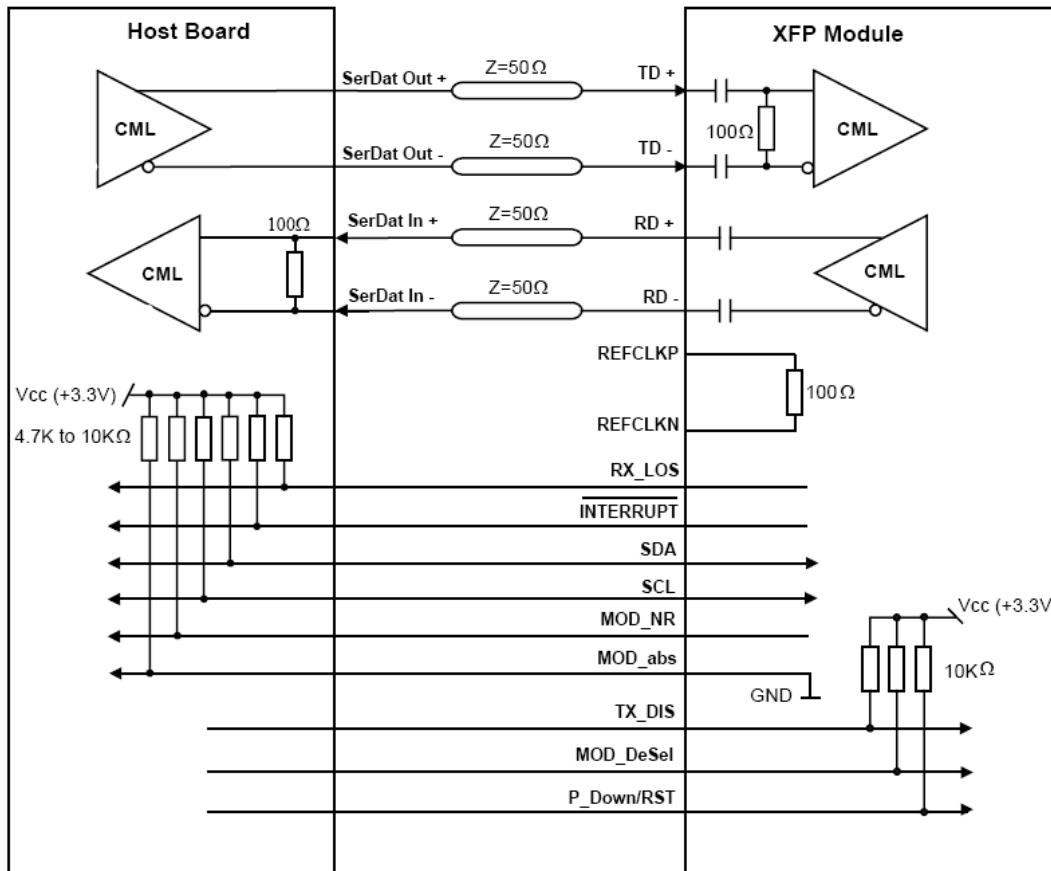


Recommended High-speed Interface Circuit



RoHS compliant
10G XFP CWDM Transceiver
XFP CWDM 80KM Optical Transceivers
Duplex LC,1470~1610nm, CWDM, EML, APD Receiver, Single Mode,
80km

Mechanical Dimensions:

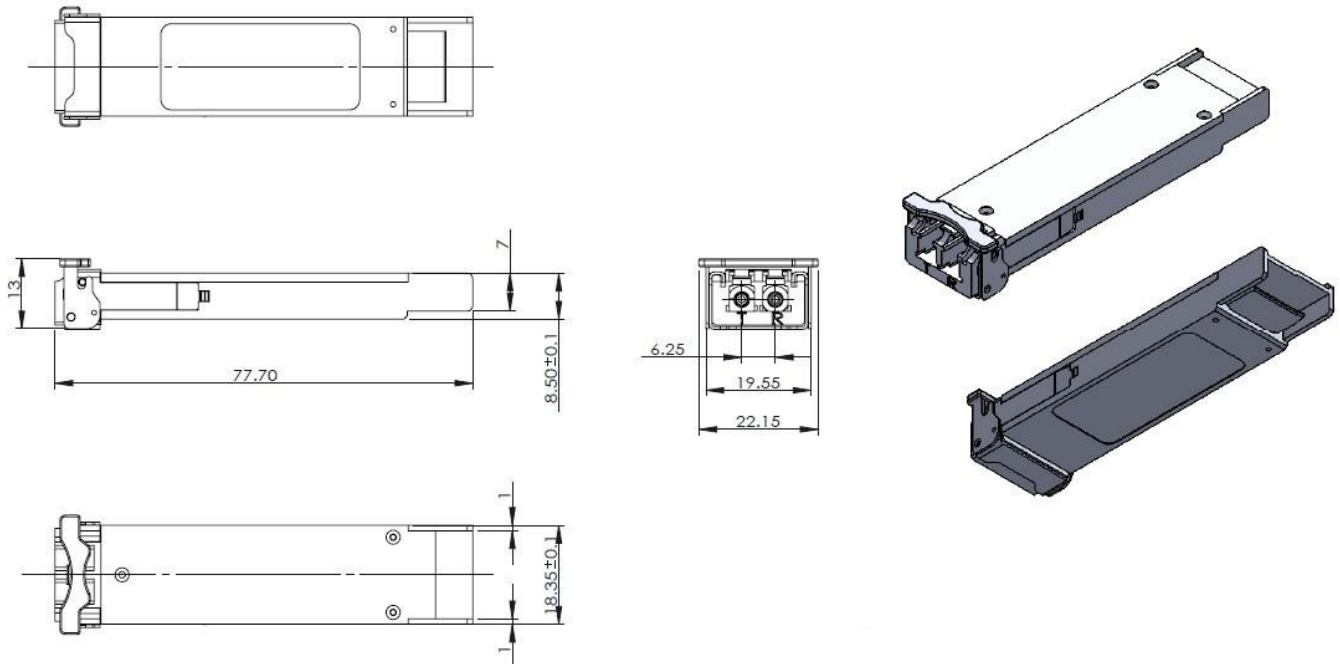

Notice:

Carelink reserves the right to make changes or discontinue any optical link product or service identified in this publication, without notice, in order to improve design and/or performance.

Applications that are described herein for any of the optical link products are for illustrative purposes only. Carelink makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.