



RoHS compliant
TX-1330/RX-1270 nm Single-mode Bi-directional
SFP LC Simplex Connector (80km) DDM
1330nm DFB laser and APD receiver for CL-SFP+_80-33



Description

- Supports 9.95Gbps to 11.3Gbps bit rates
- Hot-pluggable SFP+ footprint
- Single LC for Bi-directional Transmission
- Maximum link length of 80 Km
- Built-in 1270/1330 WDM Filter
- Uncooled 1270nm or 1330nm CWDM DFB Laser.
- Power dissipation <1.5W
- No Reference Clock required
- Built-in digital diagnostic functions
- Temperature range -5°C to 70°C
- Very low EMI and excellent ESD protection
- RoHS Compliant Part

Applications

- 10GBASE-LR/LW Ethernet
- SONET OC-192 / SDH
- 10G Fibre Channel

Ordering Information

PART NUMBER	TX/RX	INPUT/OUTPUT	SIGNAL DETECT	TEMPERATURE	LD Type	Distance
CL-SFP+_80-33	1330/1270	AC/AC	TTL	-5°C to 70 °C	DFB	80km
CL-SFP+_80-33e	1330/1270	AC/AC	TTL	-30°C to 70 °C	DFB	80km
CL-SFP+_80-33i	1330/1270	AC/AC	TTL	40°C to 85 °C	DFB	80km



RoHS compliant
TX-1330/RX-1270 nm Single-mode Bi-directional
SFP LC Simplex Connector (80km) DDM
1330nm DFB laser and APD receiver for CL-SFP+_80-33

1. General Description

Carelink's single fiber 10Gbps SFP+ BIDI transceivers are compliant with Multi-Source Agreement (MSA) Specification. The modules are complied with 10GBASE-LR/LW Ethernet, SONET OC-192 / SDH and 10G Fibre Channel 1200-SM-LL-L. Digital diagnostics functions are available via a 2-wire serial interface, as specified in the SFP+ MSA.

2. Absolute Maximum Ratings

Unless specified else, the specifications below are defined at $T_c=25 \pm 3^\circ\text{C}$

Parameter	Symbol	min	typ	max	unit
Storage Temperature	Tstg	-40		+85	°C
Operating Case Temperature	Topr	-5		+70	°C
Relative Humidity	RH	0		85	%
Supply Voltage	VCCT, R	+3.135		+3.465	V
Supply Current	ICC			450	mA
Power Dissipation	PD			1.5	W

3. Optical & Electrical Specification

Optical Parameters ($T_{OP} = 0$ to 70°C , $V_{CC} = 3.135$ to 3.465 Volts)

Parameter	Symbol	min	typ	max	unit	Note
Transmitter						
Bit Rate		9.9		11.3	Gbps	
Output Optical Power	OP	+3		+8	dBm	
Central Wavelength 1270 TX	λ_c 1270 TX	1267	1270	1273	nm	
Central Wavelength 1330 TX	λ_c 1330 TX	1327	1330	1333	nm	
Extinction Ratio	ER	3.5			dB	
Spectral width	$\Delta\lambda$			1	nm	



RoHS compliant
 TX-1330/RX-1270 nm Single-mode Bi-directional
 SFP LC Simplex Connector (80km) DDM
 1330nm DFB laser and APD receiver for CL-SFP+_80-33

Side Mode Suppression Ratio	SMSR	35			dB	
Optical Eye Mask		Compliant with IEEE802.3ae				
Receiver						
Bit Rate		9.9		11.3	Gbps	
Output Optical Power	OP	+3		+8	dBm	
Optical Wavelength	λ_c 1330 RX	1327	1330	1333	nm	
Central Wavelength 1270 TX	λ_c 1270 RX	1267	1270	1273	nm	
Saturation Power	SAT	-7			dBm	
Sensitivity	SEN			-23	dBm	1
LOS De-Assert	LOSD			-24	dBm	
LOS Assert	LOSA	-35			dBm	
LOS Hysteresis	LOSH	0.5		4	dB	

Notes:

Note 1) Measured with a PRBS of 2³¹-1 at 1 x 10⁻¹² BER and 3.5 dB extinction ratio.

Electrical Characteristics (T_{OP} = 0 to 70°C, VCC = 3.135 to 3.465 Volts)

Parameter	Symbol	min	typ	max	unit	Note
Transmitter						
Differential input voltage swing		180		700	mVpp	1
Transmit Disable Input H	V _{IH}	2.0		VCC+0.3	V	
Transmit Disable Input L	V _{IL}	0		0.8	V	
Transmit Enable Output H	V _{OH}	2.4		VCC+0.3	V	
Transmit Enable Output L	V _{OL}	0		0.4	V	2
Input Differential Impedance	Z _{in}	80	100	120	Ω	
Optical Eye Mask		Compliant with IEEE802.3ae				
Receiver						
Differential input voltage swing		300		850	mVpp	3
LOS Output H	V _{OH}	2.4		VCC+0.3	V	2
LOS Output L	V _{OL}	0		0.4	V	
Input Differential Impedance	Z _{in}	80	100	120	Ω	



RoHS compliant
TX-1330/RX-1270 nm Single-mode Bi-directional
SFP LC Simplex Connector (80km) DDM
1330nm DFB laser and APD receiver for CL-SFP+_80-33

Notes:

Note 1) TD+/- are internally AC coupled with 100Ω differential termination inside the module.

Note 2) Tx Fault and Rx LOS are open collector outputs, which should be pulled up with 4.7k to 10kΩ resistors on the host board. Pull up voltage between 2.0V and Vcc+0.3V.


Note 3) RD+/- outputs are internally AC coupled, and should be terminated with 100Ω (differential) at the user SERDES.

4. Pin Assignment

Diagram of Host Board Connector Block Pin Numbers and Name



RoHS compliant
 TX-1330/RX-1270 nm Single-mode Bi-directional
 SFP LC Simplex Connector (80km) DDM
 1330nm DFB laser and APD receiver for CL-SFP+_80-33

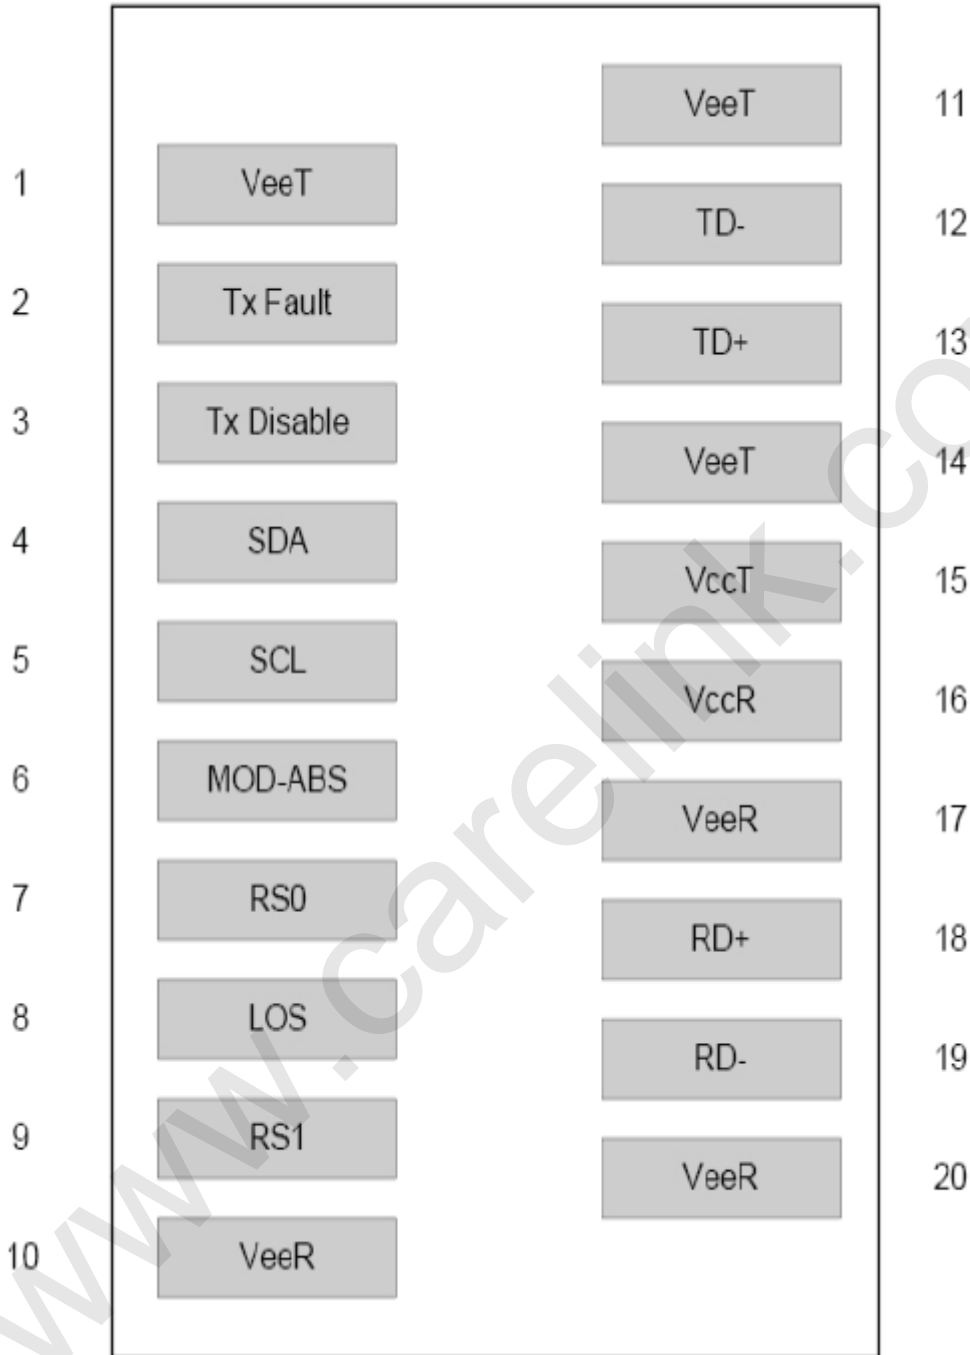

5. Pin Function Definitions

PIN #	Name	Function	Notes
1	VeeT	Module transmitter ground	1



RoHS compliant
TX-1330/RX-1270 nm Single-mode Bi-directional
SFP LC Simplex Connector (80km) DDM
1330nm DFB laser and APD receiver for CL-SFP+_80-33

2	Tx Fault	Module transmitter fault	2
3	Tx Disable	Transmitter Disable; Turns off transmitter laser output	3
4	SDL	2 wire serial interface data input/output (SDA)	
5	SCL	2 wire serial interface clock input (SCL)	
6	MOD-ABS	Module Absent, connect to VeeR or VeeT in the module	2
7	RS0	Rate select0, optionally control SFP+ receiver. When high, input data rate >4.5Gb/s; when low, input data rate <=4.5Gb/s	
8	LOS	Receiver Loss of Signal Indication	4
9	RS1	Rate select0, optionally control SFP+ transmitter. When high, input data rate >4.5Gb/s; when low, input data rate <=4.5Gb/s	
10	VeeR	Module receiver ground	1
11	VeeR	Module receiver ground	1
12	RD-	Receiver inverted data out put	
13	RD+	Receiver non-inverted data out put	
14	VeeR	Module receiver ground	1
15	VccR	Module receiver 3.3V supply	
16	VccT	Module transmitter 3.3V supply	
17	VeeT	Module transmitter ground	1
18	TD+	Transmitter inverted data out put	
19	TD-	Transmitter non-inverted data out put	
20	VeeT	Module transmitter ground	1

Notes:

Note 1) The module ground pins shall be isolated from the module case.

Note 2) This pin is an open collector/drain output pin and shall be pulled up with 4.7K-10Kohms to Host_Vcc on the host board.

Note 3) This pin shall be pulled up with 4.7K-10Kohms to VccT in the module.

Note 4) This pin is an open collector/drain output pin and shall be pulled up with 4.7K-10Kohms to Host_Vcc on the host board.

6. SFP Module EEPROM Information and Management

The SFP modules implement the 2-wire serial communication protocol as defined in the SFP -8472. The serial ID information of the SFP modules and Digital Diagnostic Monitor parameters can be accessed through the I2C interface at address A0h and A2h. The memory is mapped in Table 1. Detailed ID information (A0h) is listed in Table 2. And the DDM specification is in the address of A2h. For more details of the memory map



RoHS compliant
TX-1330/RX-1270 nm Single-mode Bi-directional
SFP LC Simplex Connector (80km) DDM
1330nm DFB laser and APD receiver for CL-SFP+_80-33

and byte definitions, please refer to the SFF-8472, “Digital Diagnostic Monitoring Interface for Optical Transceivers”. The DDM parameters have been internally calibrated.

Table 1. Digital Diagnostic Memory Map (Specific Data Field Descriptions)

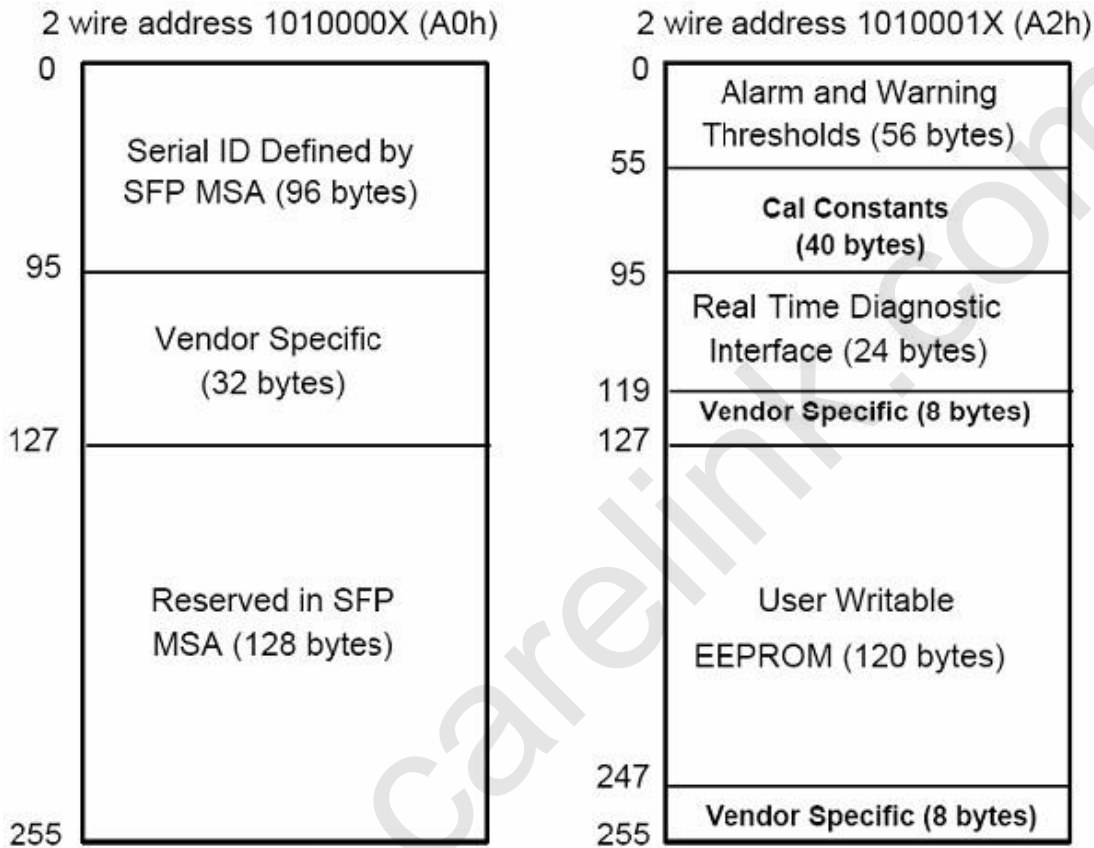


Table 2 - EEPROM Serial ID Memory Contents (A0h)

Data Address	Length (Byte)	Name of Length	Description and Contents
Base ID Fields			



RoHS compliant
TX-1330/RX-1270 nm Single-mode Bi-directional
SFP LC Simplex Connector (80km) DDM
1330nm DFB laser and APD receiver for CL-SFP+_80-33

0	1	Identifier	Type of Serial transceiver (03h=SFP)
1	1	Reserved	Extended identifier of type serial transceiver (04h)
2	1	Connector	Code of optical connector type (07=LC)
3-10	8	Transceiver	10G Base-LR
11	1	Encoding	64B/66B
12	1	BR, Nominal	Nominal baud rate, unit of 100Mbps
13-14	2	Reserved	(0000h)
15	1	Length(9um)	Link length supported for 9/125um fiber, units of 100m
16	1	Length(50um)	Link length supported for 50/125um fiber, units of 10m
17	1	Length(62.5um)	Link length supported for 62.5/125um fiber, units of 10m
18	1	Length(Copper)	Link length supported for copper, units of meters
19	1	Reserved	
20-35	16	Vendor Name	SFP vendor name: Carelink
36	1	Reserved	
37-39	3	Vendor OUI	SFP transceiver vendor OUI ID
40-55	16	Vendor PN	P/N: "F438L17427-R33" or "F438L17433-R27" (ASCII)
56-59	4	Vendor rev	Revision level for part number
60-62	3	Reserved	
63	1	CCID	Least significant byte of sum of data in address 0-62
Extended ID Fields			
64-65	2	Option	Indicates which optical SFP signals are implemented (001Ah = LOS, TX_FAULT, TX_DISABLE all supported)
66	1	BR, max	Upper bit rate margin, units of %
67	1	BR, min	Lower bit rate margin, units of %
68-83	16	Vendor SN	Serial number (ASCII)
84-91	8	Date code	Manufacturing date code
92-94	3	Reserved	
95	1	CCEX	Check code for the extended ID Fields (addresses 64 to 94)
Vendor Specific ID Fields			
96-127	32	Readable	Specified date, read only
128-255	128	Reserved	Reserved for SFF-8079

7. Digital Diagnostic Monitor Characteristics



RoHS compliant
TX-1330/RX-1270 nm Single-mode Bi-directional
SFP LC Simplex Connector (80km) DDM
1330nm DFB laser and APD receiver for CL-SFP+_80-33

Data Address	Parameter	Accuracy	Unit
96-97	Transceiver Internal Temperature	±3.0	°C
98-99	VCC3 Internal Supply Voltage	±3.0	%
100-101	Laser Bias Current	±1.0	%
102-103	Tx Output Power	±3.0	dBm
104-105	Rx Input Power	±3.0	dBm

8. Regulatory Compliance


The SFP+ BIDI modules are complied with international Electromagnetic Compatibility (EMC) and international safety requirements and standards (see details in Table following).

Electrostatic Discharge (ESD) to the Electrical Pins	MIL-STD-883E Method 3015.7	Class 1(>1000 V)
Electrostatic Discharge (ESD) to the Single LC Receptacle	IEC 61000-4-2 GR-1089-CORE	Compatible with standards
Electromagnetic Interference (EMI)	FCC Part 15 Class B EN55022 Class B (CISPR 22B) VCCI Class B	Compatible with standards
Laser Eye Safety	FDA 21CFR 1040.10 and 1040.11 EN60950, EN (IEC) 60825-1,2	Compatible with Class 1 laser product.


9. Recommended Circuit



RoHS compliant
 TX-1330/RX-1270 nm Single-mode Bi-directional
 SFP LC Simplex Connector (80km) DDM
 1330nm DFB laser and APD receiver for CL-SFP+_80-33

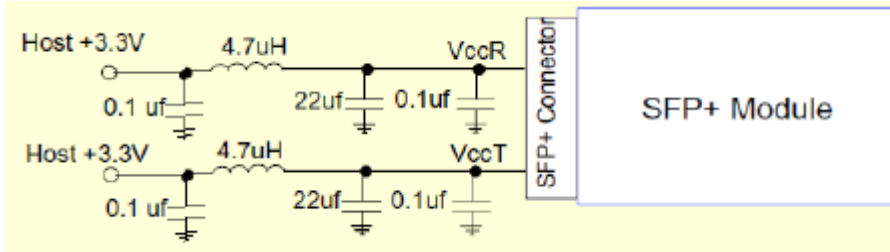

Recommended Host Board Power Supply Circuit

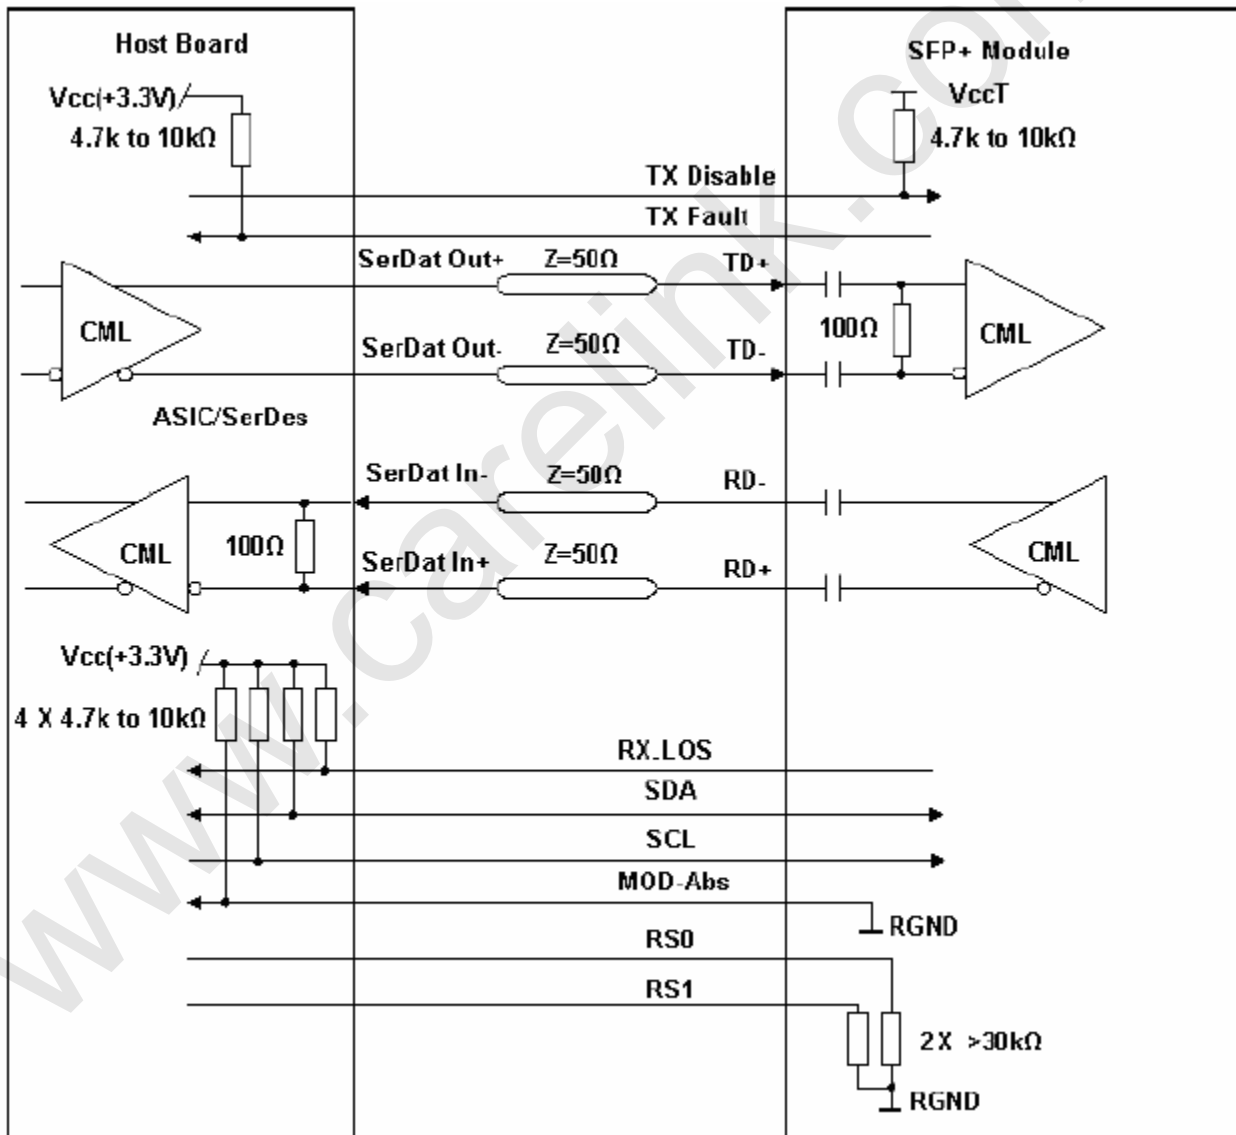

Recommended High-speed Interface Circuit

10. Outlooking Dimension (in mm)



RoHS compliant
TX-1330/RX-1270 nm Single-mode Bi-directional
SFP LC Simplex Connector (80km) DDM
1330nm DFB laser and APD receiver for CL-SFP+_80-33

