



RoHS compliant  
CL-QSFP+\_LX4-2  
40Gb/s 2km QSFP+ Transceiver  
LX4 2km(SMF)@150m(MMF@OM3) DDM Transceiver

### Features

- Supports 41.2 Gb/s aggregate bit rates
- Uncooled 4x10Gb/s transmitter
- Maximum link length of 2km on Single Mode Fiber (SMF)

And 150m on OM3(MMF)

- Hot-pluggable QSFP+ footprint
- Duplex LC receptacles
- Power dissipation<3.5W
- RoHS-6 compliant and lead-free
- Single 3.3V power supply
- Support Digital Diagnostic Monitor interface
- Case operating temperature  
Commercial: -5°C to +70°C

### Applications

- 40GBASE-LX4 Ethernet
- QSFP+ MSA
- SFF-8436
- IEEE802.3ba
- RoHS

### Ordering Information

PART NUMBER	INPUT/OUTPUT	SIGNAL DETECT	VOLTAGE	TEMPERATURE
CL-QSFP+_LX4-2	AC/AC	TTL	3.3V	-5°C to 70 °C
CL-QSFP+_LX4-2i	AC/AC	TTL	3.3V	-40°C to 85 °C



RoHS compliant  
CL-QSFP+\_LX4-2  
40Gb/s 2km QSFP+ Transceiver  
LX4 2km(SMF)@150m(MMF@OM3) DDM Transceiver

## Description

Transceiver modules are designed for use in 40 Gigabit Ethernet links over single-mode fiber and multi-mode fiber. They are compliant with the QSFP+ MSA and IEEE 802.3ba 40GBASE-LX4. Module-level digital diagnostic functions are available via an I<sup>2</sup>C interface, as specified by the QSFP+ MSA. The optical transceiver is compliant per the RoHS Directive 2011/65/EU.

### I. Absolute Maximum Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Ref.
Storage Temperature	T <sub>s</sub>	-40		85	°C	
Storage Ambient Humidity	H <sub>A</sub>	5		95	%	
Maximum Supply Voltage	V <sub>CC1</sub> , V <sub>CCTx</sub> , V <sub>CCRx</sub>	-0.5		3.6	V	
Signal Input Voltage		-0.3		V <sub>CC</sub> +0.3	V	
Receiver Damage Threshold		+3.4			dBm	
Lead Soldering Temperature/Time	TSOLD			260/10	°C/sec	1
Lead Soldering Temperature/Time	TSOLD			360/10	°C/sec	2

Notes:

1. Suitable for wave soldering.
2. Only for soldering by iron.



RoHS compliant  
 CL-QSFP+\_LX4-2  
 40Gb/s 2km QSFP+ Transceiver  
 LX4 2km(SMF)@150m(MMF@OM3) DDM Transceiver

## II. General Product Characteristics

Parameter	Value	Unit	Ref.
Module Form Factor	QSFP+		
Number of Lanes	4 Tx and 4 Rx		
Maximum Aggregate Data Rate	41.2	Gb/s	
Maximum Data Rate per Lane	10.3125	Gb/s	Higher bit rates may be supported. Please contact Carelink
Protocols Supported	Typical applications include 40G Ethernet		
Management Interface	Serial, I2c-based, 400kHz maximum frequency		As defined by the QSFP+ MSA

Data Rate Specifications	Symbol	Min.	Typ.	Max.	Unit	Ref.
Bit Rate per Lane	BR			10313	Mb/s	1
Bit Error Ratio	BER			10 <sup>-12</sup>		2
Link distance on SMF/MMF	d			2; 0.15(OM3)	km	

Notes:

- Compliant with 40GBASE-LX4 and XLPII per IEEE 802.3ba. Compatible with 1/10 Gigabit Ethernet and 1/2/4/8/10G Fiber Channel.
- Tested with a PRBS 231-1 test pattern.

## III. Optical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Ref.
<b>Transmitter</b>						
Total Average Launch Power for SMF	P <sub>OUT</sub>			8.3	dBm	
Total Average Launch Power for MMF				9.5	dBm	
Average Output Power per lane for SMF	P <sub>ave</sub>	-7.0		2.3	dBm	
Average Output Power per lane for MMF		-5.0		3.5	dBm	
Transmit OMA per Lane for SMF		-6.0		3.5	dBm	



RoHS compliant  
 CL-QSFP+\_LX4-2  
 40Gb/s 2km QSFP+ Transceiver  
 LX4 2km(SMF)@150m(MMF@OM3) DDM Transceiver

Transmit OMA per Lane for MMF	TxOMA	-4.0		4.5	dBm	
Extinction Ratio	ER	3.5			dB	
Center Wavelength	$\lambda_C$	1264.5	1271	1277.5	nm	
		1284.5	1291	1297.5		
		1304.5	1311	1317.5		
		1324.5	1331	1337.5		
Sidemode Suppression ratio	SMSR	30			dB	
Transmitter and Dispersion Penalty	TDP			2.6	dB	
Transmitter OFF Output Power	POff			-30	dBm	
Transmitter eye mask definition {X1, X2, X3, Y1, Y2, Y3}		0.25,0.4,0.45,0.25,0.28,0.4				
<b>Receiver</b>						
Input Optical Wavelength	$\lambda_{IN}$	1264.5	1271	1277.5	nm	
		1284.5	1291	1297.5		
		1304.5	1311	1317.5		
		1324.5	1331	1337.5		
Rx Sensitivity (OMA) per lane for SMF	R <sub>SENS1</sub>			-11.5	dBm	
Rx Sensitivity (OMA) per lane for MMF				-10.5	dBm	
Stressed Rx Sensitivity (OMA) per lane	R <sub>SENS2</sub>			-9.6	dBm	
Input Saturation Power (Overload) for SMF	PSAT			+2.3	dBm	
Input Saturation Power (Overload) for MMF				+3.5		
Receiver Reflectance	R <sub>fl</sub>			-26	dBm	
Loss of Signal Assert	P <sub>A</sub>	-30			dBm	
Loss of Signal De-assert	P <sub>D</sub>			-12.5	dBm	
LOS Hysteresis	P <sub>D</sub> - P <sub>A</sub>	0.5		6	dB	



RoHS compliant  
CL-QSFP+\_LX4-2  
40Gb/s 2km QSFP+ Transceiver  
LX4 2km(SMF)@150m(MMF@OM3) DDM Transceiver

#### IV. Electrical Interface Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Ref.
Supply Voltage	V <sub>cc1</sub> , V <sub>ccTx</sub> , V <sub>ccRx</sub>	3.15		3.45	V	
Supply Current	I <sub>cc</sub>			1000	mA	
<b>Transmitter</b>						
Input different impedance	R <sub>in</sub>	90	100	110	Ω	2
Single ended data input swing	V <sub>in</sub> , pp	120		820	mV	
Transmitter Disable Voltage	V <sub>DIS</sub>	2		V <sub>cc</sub>	V	3
Transmitter Enable Voltage	V <sub>EN</sub>	0		0.8	V	
<b>Receiver</b>						
Output different impedance	R <sub>out</sub>	90	100	110	Ω	2
Single ended data output swing	V <sub>out</sub> , pp	340		850	mV	4
LOS Asserted	V <sub>LOSA</sub>	2		V <sub>CCH</sub> OST	V	5
LOS De-asserted	V <sub>LOSD</sub>	0		0.8	V	5
Power Supply Rejection	PSR	50			mVp p	


Notes:

- 1.Maximum total power value is specified across the full temperature and voltage range.
- 2.Connected directly to TX data input pins. AC coupled thereafter.
- 3.Or open circuit.
- 4.Into 100Ω differential termination.
- 5.LossOf Signal is LVTTTL. Logic "0" indicates normal operation; logic "1" indicates no signal detected.



RoHS compliant  
 CL-QSFP+\_LX4-2  
 40Gb/s 2km QSFP+ Transceiver  
 LX4 2km(SMF)@150m(MMF@OM3) DDM Transceiver

## V. Pin Diagram

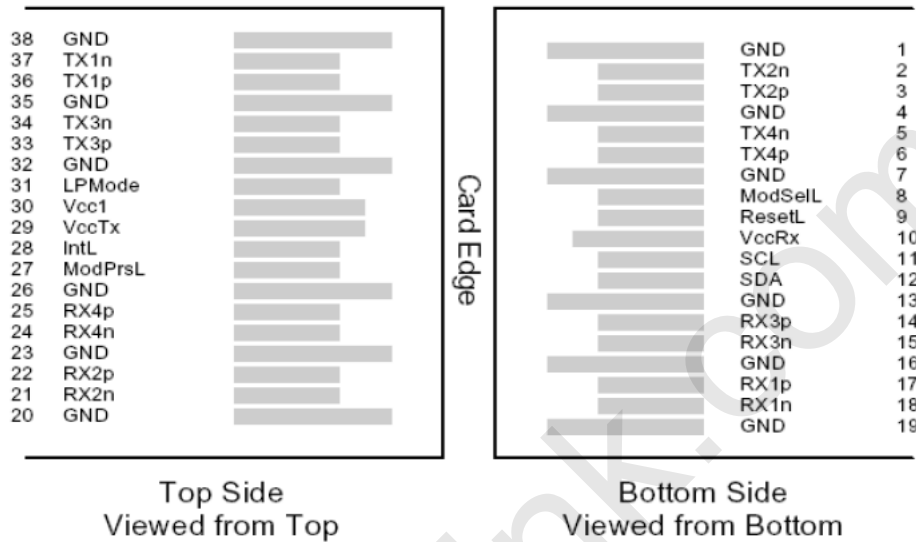

QSFP+ MSA-compliant 38-pin connector

## VI. Pin Descriptions

Pin	Symbol	Name/Description	Ref.
1	GND	Ground	1
2	Tx2n	Transmitter Inverted Data Input	
3	Tx2p	Transmitter Non-Inverted Data Input	
4	GND	Ground	1
5	Tx4n	Transmitter Inverted Data Input	
6	Tx4p	Transmitter Non-Inverted Data Input	
7	GND	Ground	1
8	ModSe1L	Module Select	
9	ResetL	Module Reset	
10	Vcc Rx	+3.3V Power supply receiver	
11	SCL	2-wire serial interface clock	



**RoHS compliant**  
**CL-QSFP+\_LX4-2**  
**40Gb/s 2km QSFP+ Transceiver**  
**LX4 2km(SMF)@150m(MMF@OM3) DDM Transceiver**

12	SDA	2-wire serial interface data	
13	GND	Ground	1
14	Rx3p	Receiver Non-Inverted Data Output	
15	Rx3n	Receiver Inverted Data Output	
16	GND	Ground	1
17	Rx1p	Receiver Non-Inverted Data Output	
18	Rx1n	Receiver Inverted Data Output	
19	GND	Ground	1
20	GND	Ground	1
21	Rx2n	Receiver Inverted Data Output	
22	Rx2p	Receiver Non-Inverted Data Output	
23	GND	Ground	1
24	Rx4n	Receiver Inverted Data Output	
25	Rx4p	Receiver Non-Inverted Data Output	
26	GND	Ground	1
27	ModPrSL	Module Present	
28	IntL	Interrupt	
29	VccTx	+3.3V Power supply transmitter	
30	Vcc1	+3.3V Power Supply	
31	LPMODE	Low Power Mode	
32	GND	Ground	1
33	Tx3p	Transmitter Non-Inverted Data Input	
34	Tx3n	Transmitter Inverted Data Input	
35	GND	Ground	1
Pin	Symbol	Name/Description	Ref.
36	Tx1p	Transmitter Non-Inverted Data Input	
37	Tx1n	Transmitter Inverted Data Input	
38	GND	Ground	1


Note:

1. Circuit ground is internally isolated from chassis ground.



RoHS compliant  
CL-QSFP+\_LX4-2  
40Gb/s 2km QSFP+ Transceiver  
LX4 2km(SMF)@150m(MMF@OM3) DDM Transceiver

## VII. Mechanical Specifications(Unit: mm)

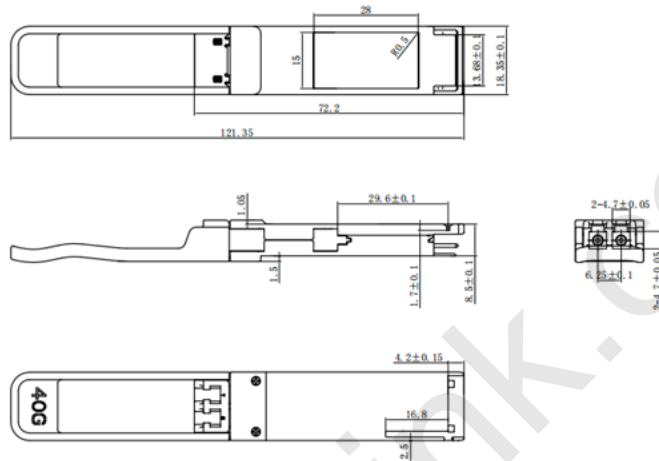

### Notice:

Carelink reserves the right to make changes or discontinue any optical link product or service identified in this publication, without notice, in order to improve design and/or performance.

Applications that are described herein for any of the optical link products are for illustrative purposes only. Carelink makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.