




RoHS compliant
CL-QSFP+_PSM4-2
40Gb/s 2km QSFP+ Transceiver
PSM4 2km DDM Transceiver

VII. Digital Diagnostic

Parameter	Symbol	Spec	Units	Condition/Note
Temperature	Te	+/-3	°C	
Voltage	VCC	+/-5%	V	
IBias	BIAS	+/-10%	mA	
Rx power	Rx-pwr	+/-3	dBm	
Tx power	Tx-pwr	+/-3	dBm	

VIII. Mechanical Specifications(Unit: mm)

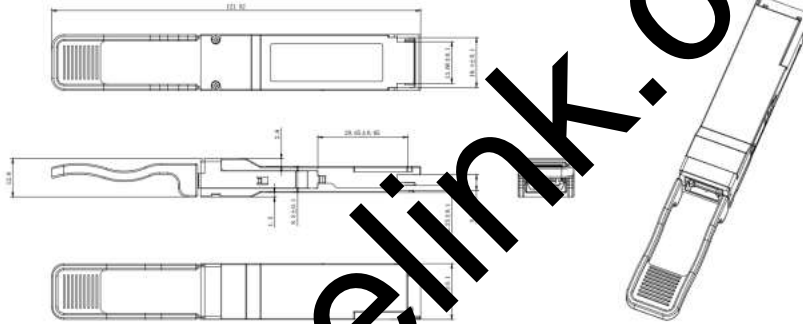

Notes:

- 1、Tolerance: +/-0.1mm.
- 2、Others according to SFF-8661 or customer spec .
- 3、Optical port according to fiber connector spec.

Notice:

Carelink reserves the right to make changes or discontinue any optical link product or service identified in this publication, without notice, in order to improve design and/or performance.

Applications that are described herein for any of the optical link products are for illustrative purposes only. Carelink makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.