




RoHS compliant
Multi-Rate 1310 nm Single-mode Transceiver
SFP LC Connector
Small Form Pluggable (SFP), 3.3V, with Diagnostic Monitoring

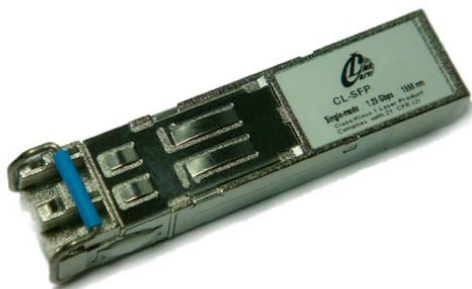

Features

- Up to 2.67Gb/s data links
- Duplex LC connector
- Hot-pluggable SFP footprint
- 1310nm DFB laser transmitter
- RoHS compliant and Lead Free
- Up to 20km on 9/125um SMF
- Metal enclosure for lower EMI
- Single +3.3V power supply
- Low power dissipation <800mW
- Commercial and industrial operating temperature optional
- SFP MSA SFF-8074i Compliant

Applications

- SONET OC-48 IR-1 / SDH STM S-16.1
- Gigabit Ethernet / Fibre Channel

Ordering Information

PART NUMBER	INPUT/OUTPUT	SIGNAL DETECT	VOLTAGE	TEMPERATURE	LD Type
CL-SFP-31-20/2,5 DD	AC/AC	TTL	3.3V	-5°C to 70 °C	DFB

General

Carelink's CL-SFP-31-20/2,5 DD Small Form Factor Pluggable (SFP) transceivers are compatible with the Small Form Factor Pluggable Multi-Sourcing Agreement (MSA). The SFP transceivers are high performance, cost effective modules supporting dual data-rate of 2.488Gbps/2.125Gbps and 20km transmission distance with SMF. They are RoHS compliant and lead-free.



RoHS compliant
Multi-Rate 1310 nm Single-mode Transceiver
SFP LC Connector
Small Form Pluggable (SFP), 3.3V, with Diagnostic Monitoring

Regulatory Compliance

- ESD to the Electrical PINs: compatible with MIL-STD-883 Method 3015
- ESD to the Duplex LC Receptacle: compatible with IEC 61000-4-2
- Immunity compatible with IEC 61000-4-3
- EMI compatible with FCC Part 15 Class B EN55022 Class B (CISPR 22B) VCCI Class B
- Laser Eye Safety compatible with FDA 21CFR 1040.10 and 1040.11 EN60950, EN (IEC) 60825-1,2
- RoHs compliant with 2002/95/EC 4.1&4.2 2005/747/EC

Pin Descriptions


Pin Symbol	Name/Description	Ref.
1 VeeT	Transmitter Ground (Common with Receiver Ground)	1
2 TX Fault	Transmitter Fault.	
3 TX Disable	Transmitter Disable. Laser output disabled on high or open.	2
4 MOD_DEF(2)	Module Definition 2. Data line for Serial ID.	3
5 MOD_DEF(1)	Module Definition 1. Clock line for Serial ID.	3
6 MOD_DEF(0)	Module Definition 0. Grounded within the module.	3
7 Rate Select	No connection required	
8 LOS	Loss of Signal indication. Logic 0 indicates normal operation.	4
9 VeeR	Receiver Ground (Common with Transmitter Ground)	1
10 VeeR	Receiver Ground (Common with Transmitter Ground)	1
11 VeeR	Receiver Ground (Common with Transmitter Ground)	1
12 RD-	Receiver Inverted DATA out. AC Coupled	
13 RD+	Receiver Non-inverted DATA out. AC Coupled	
14 VeeR	Receiver Ground (Common with Transmitter Ground)	1
15 VccR	Receiver Power Supply	
16 VccT	Transmitter Power Supply	
17 VeeT	Transmitter Ground (Common with Receiver Ground)	1
18 TD+	Transmitter Non-Inverted DATA in. AC Coupled.	
19 TD-	Transmitter Inverted DATA in. AC Coupled.	
20 VeeT	Transmitter Ground (Common with Receiver Ground)	1

Notes:

1. Circuit ground is internally isolated from chassis ground.
2. Laser output disabled on TX Disable >2.0V or open, enabled on TX Disable <0.8V.
3. Should be pulled up with 4.7k - 10kohms on host board to a voltage between 2.0V and 3.6V. MOD_DEF(0) pulls line low to indicate module is plugged in.
4. LOS is open collector output. Should be pulled up with 4.7k – 10kohms on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.



RoHS compliant
Multi-Rate 1310 nm Single-mode Transceiver
SFP LC Connector
Small Form Pluggable (SFP), 3.3V, with Diagnostic Monitoring

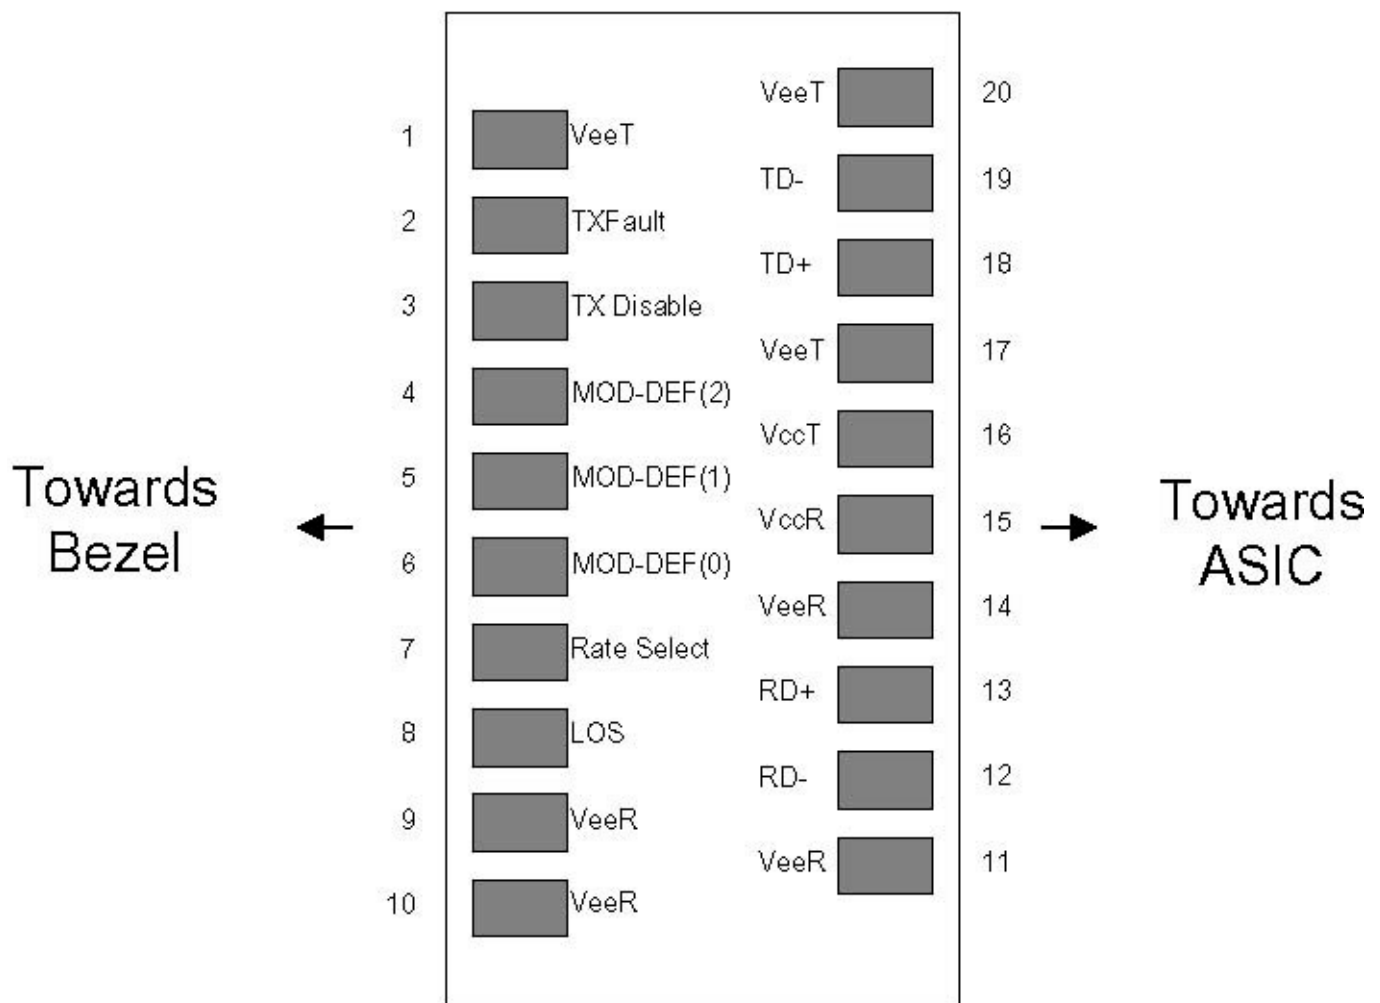


Pin-out of Connector Block on Host Board

[Recommend Circuit Schematic](#)



RoHS compliant
Multi-Rate 1310 nm Single-mode Transceiver
SFP LC Connector
Small Form Pluggable (SFP), 3.3V, with Diagnostic Monitoring

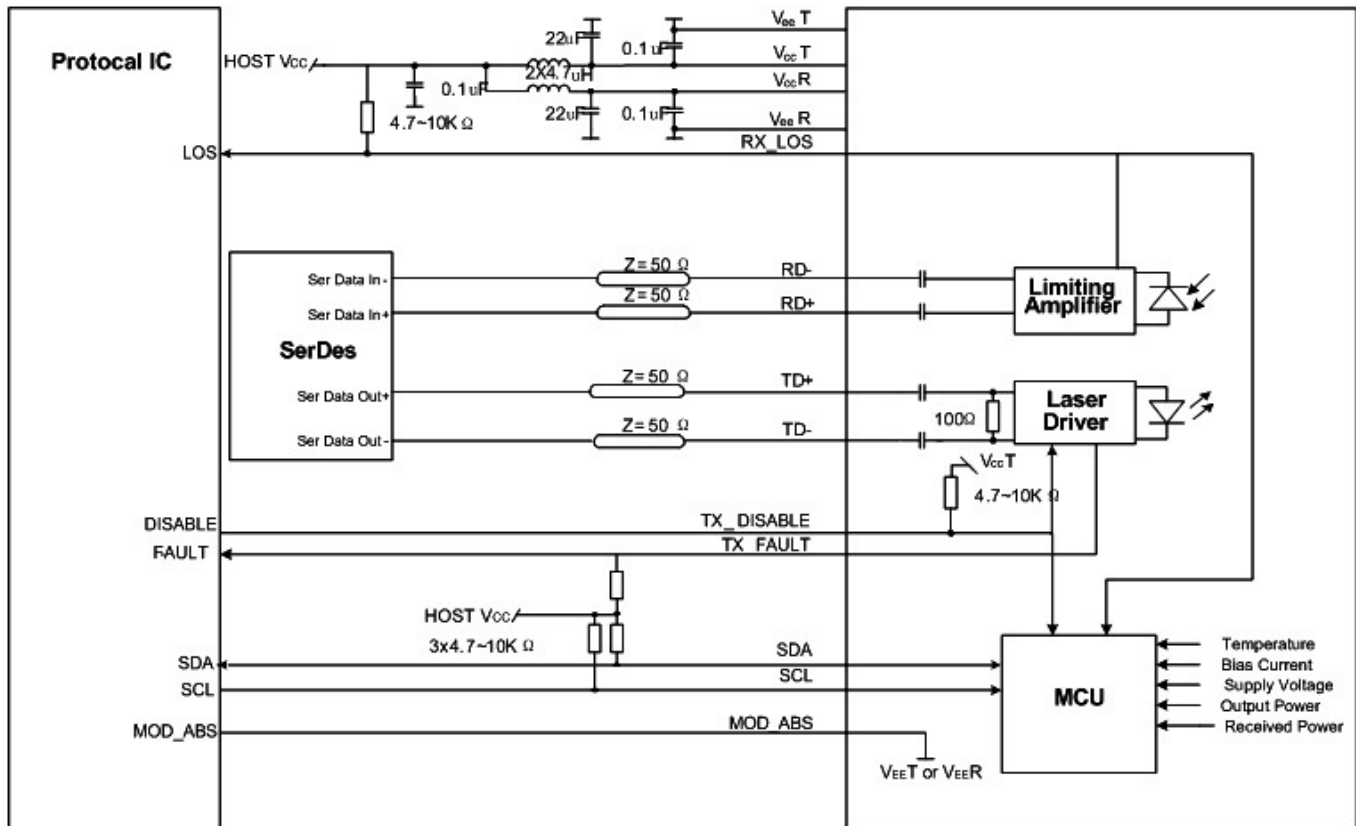

Absolute Maximum Ratings

Parameter	Symbol	Min	Typ	Max	Unit	Ref.
Maximum Supply Voltage	Vcc	-0.5		+4.0	V	
Storage Temperature	TS	-40		+85	°C	
Operating Humidity	RH	5		95	%	



RoHS compliant
Multi-Rate 1310 nm Single-mode Transceiver
SFP LC Connector
Small Form Pluggable (SFP), 3.3V, with Diagnostic Monitoring

Recommended Operating Conditions

Parameter	Symbol	Min	Typ	Max	Unit	Ref.
Power Supply Voltage	Vcc	3.13	3.30	3.47	V	
Power Supply Current	Icc	-	-	250	mA	
Case Operating Temperature	Tc	-5	-	+70	°C	1
	Ti	-40	-	+85		2
Data Rate(SONET/SDH)	-	-	2.488	-	Gbps	
Data Rate(Fibre Channel)	-	-	2.125	-	Gbps	
9/125um G.652 SMF	Lmax	-	-	20	km	

Notes:

1. For commercial class product.
2. For industrial class product.

Electrical Characteristics (TOP=25°C, Vcc=3.3Volts)

Parameter	Symbol	Min	Typ	Max	Unit	Ref.
Transmitter						
Input differential impedance	Rin	-	100	-	Ω	1
Single ended data input swing	Vin, pp	250	-	1200	mV	
TX Disable-High	-	Vcc – 1.3	-	Vcc	V	
TX Disable-Low	-	Vee	-	Vee+ 0.8	V	
TX Fault-High	-	Vcc-0.5	-	Vcc	V	
TX Fault-Low	-	Vee	-	Vee+0.5	V	
Receiver						
Single ended data output swing	Vout, pp	300	400	800	mV	2
Data output rise time	tr	-	-	175	ps	3
Data output fall time	tf	-	-	175	ps	3
LOS-High	-	Vcc – 0.5	-	Vcc	V	
LOS-Low	-	Vee	-	Vee+0.5	V	

Notes:

1. AC coupled.
2. Into 100 ohm differential termination.
3. 20 – 80 %



RoHS compliant
Multi-Rate 1310 nm Single-mode Transceiver
SFP LC Connector
Small Form Pluggable (SFP), 3.3V, with Diagnostic Monitoring


Optical Characteristics (TOP=25°C, Vcc=3.3 Volts)

Parameter	Symbol	Min	Typ	Max	Unit	Ref.
Transmitter						
Output Opt. Power	PO	-5	-	0	dBm	1
Optical Wavelength	λ	1260	1310	1360	nm	
Spectral Width(-20dB)	$\Delta\lambda$	-	-	1	nm	
Side Mode Suppression Ratio	SMSR	30	-	-	dB	
Optical Rise/Fall Time	tr/ta	-	-	160	ps	2
Total Generated Transmitter Jitter (peak to peak)		-	-	0.07	UI	3
Total Generated Transmitter Jitter (rms)		-	-	0.007	UI	
Optical Extinction Ratio	ER	8.2	-	-	dB	
Receiver						
RX Sensitivity @OC-48	SENS1	-	-	-23	dBm	4, 5
RX Sensitivity @2.125 Gb/s	SENS2	-	-	-24	dBm	4, 5
Receiver Overload		0	-	-	dBm	
Optical Center Wavelength	λ_c	1270	-	1600	nm	
LOS De-Assert	LOSD	-	-	-20	dBm	
LOS Assert	LOSA	-35	-	-	dBm	
LOS Hysteresis		-	0.5	-	5	dB

Notes:

1. Class 1 Laser Safety.
2. Unfiltered, 20-80%. Complies with OC-48 and FC2x eye masks when filtered.
3. Measured with DJ-free data input signal .In actual application, output DJ will be the sum of input DJ and Δ DJ.
4. Measured with conformance signals defined in FC-PI-2 Rev. 10.0 specifications.
5. Measured with PRBS 2²³-1 at 10⁻¹⁰ BER.

Mechanical Specifications

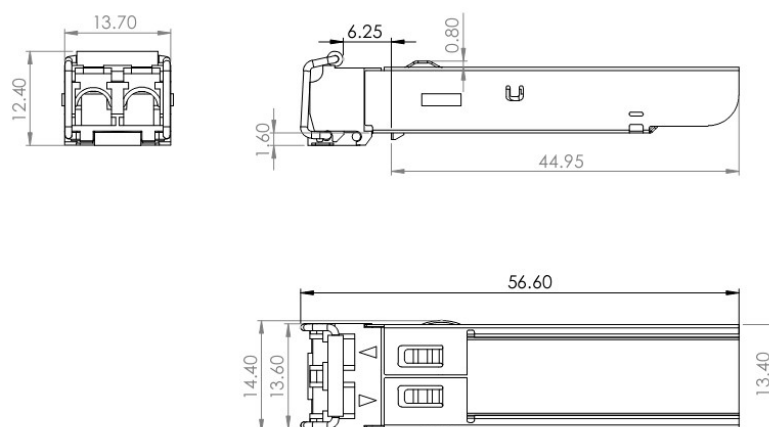




RoHS compliant
Multi-Rate 1310 nm Single-mode Transceiver
SFP LC Connector
Small Form Pluggable (SFP), 3.3V, with Diagnostic Monitoring

EEPROM Information

EEPROM memory map specific data field description is as below:

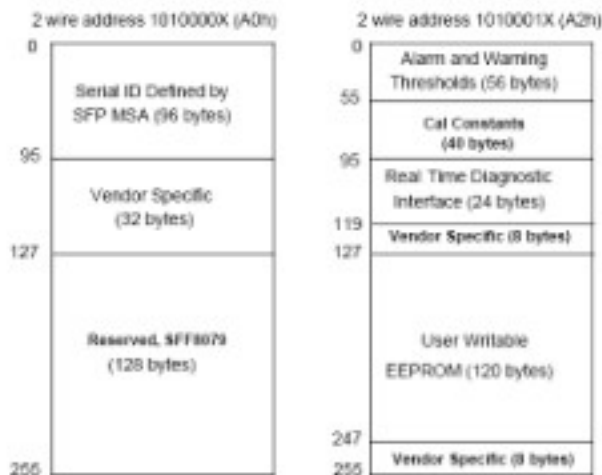

Digital Diagnostic Monitoring Interface

Five transceiver parameter values are monitored. The following table defines the monitored parameter's accuracy.

Parameter	Range	Accuracy	Calibration
Temperature	-5 to +70°C (C)	±3°C	Internal
	-40 to +85°C (I)		
Voltage	2.97 to 3.63V	±3%	Internal
Bias Current	0 to 100mA	±10%	Internal
TX Power	-5 to 0dBm	±3dB	Internal
RX Power	-18 to 0dBm	±3dB	Internal