



**RoHS compliant**  
**622Mb/s 1310nm Single-mode SFP Transceiver**  
**SFP LC Duplex Connector (20km)**  
**Up to 622Mb/s data links with DDM**



### Description

- ✦ Up to 622Mb/s data links
- ✦ FP laser transmitter and PIN photo-detector.
- ✦ Up to 20km on 9/125µm SMF
- ✦ Hot-pluggable SFP footprint
- ✦ Duplex LC/UPC type pluggable optical interface
- ✦ Low power dissipation
- ✦ Metal enclosure, for lower EMI
- ✦ RoHS compliant and lead-free
- ✦ Support Digital Diagnostic Monitoring interface
- ✦ Single +3.3V power supply
- ✦ Compliant with SFF-8472
- ✦ Case operating temperature  
Commercial: 0°C to +70°C  
Extended: -10°C to +80°C  
Industrial: -40°C to +85°C

### Applications

- ✦ Switch to Switch Interface
- ✦ Fast Ethernet
- ✦ Switched Backplane Applications
- ✦ Router/Server Interface
- ✦ Other Optical Links

### Ordering Information

| PART NUMBER             | TX/RX | INPUT/OUTPUT | SIGNAL DETECT | TEMPERATURE    | LD Type | Distance |
|-------------------------|-------|--------------|---------------|----------------|---------|----------|
| CL-SFP-MR-31-20/622 DD  | -     | AC/AC        | TTL           | 0°C to 70 °C   | DFB     | 20km     |
| CL-SFP-MR-31-20/622 DDi | -     | AC/AC        | TTL           | -40°C to 85 °C | DFB     | 20km     |



**RoHS compliant**  
**622Mb/s 1310nm Single-mode SFP Transceiver**  
**SFP LC Duplex Connector (20km)**  
**Up to 622Mb/s data links with DDM**

## PRODUCT DESCRIPTION

Carelink's CL-SFP-MR-31-20/622 DD Small Form Factor Pluggable (SFP) transceivers are compatible with the Small Form Factor Pluggable Multi-Sourcing Agreement (MSA). The transceiver consists of five sections: the LD driver, the limiting amplifier, the digital diagnostic monitor, the DFB laser and the APD receiver. The module data link up to 20KM in 9/125um single mode fiber.

The optical output can be disabled by a TTL logic high-level input of Tx Disable, and the system also can disable the module via I2C. Tx Fault is provided to indicate that degradation of the laser. Loss of signal (LOS) output is provided to indicate the loss of an input optical signal of receiver or the link status with partner. The system can also get the LOS (or Link)/Disable/Fault information via I2C register access.

## Ordering information

| Product part Number     | Data Rate (Mbps) | Media             | Wavelength (nm) | Transmission Distance(km) | Temperature Range(Tcase) (°C) |            |
|-------------------------|------------------|-------------------|-----------------|---------------------------|-------------------------------|------------|
| CL-SFP-MR-31-20/622 DD  | 622              | Single mode fiber | 1310            | 20                        | 0~70                          | commercial |
| CL-SFP-MR-31-20/622 DDe | 622              | Single mode fiber | 1310            | 20                        | -10~80                        | extended   |
| CL-SFP-MR-31-20/622 DDi | 622              | Single mode fiber | 1310            | 20                        | -40~85                        | industrial |



**RoHS compliant**  
**622Mb/s 1310nm Single-mode SFP Transceiver**  
**SFP LC Duplex Connector (20km)**  
**Up to 622Mb/s data links with DDM**

## I. Pin Descriptions

| Pin | Symbol             | Name/Description   | Ref. |
|-----|--------------------|--|------|
| 1   | V <sub>EET</sub>   | Transmitter Ground (Common with Receiver Ground)               | 1    |
| 2   | T <sub>FAULT</sub> | Transmitter Fault.   |      |
| 3   | T <sub>DIS</sub>   | Transmitter Disable. Laser output disabled on high or open.    | 2    |
| 4   | MOD_DEF(2)         | Module Definition 2. Data line for Serial ID.                  | 3    |
| 5   | MOD_DEF(1)         | Module Definition 1. Clock line for Serial ID.                 | 3    |
| 6   | MOD_DEF(0)         | Module Definition 0. Grounded within the module.               | 3    |
| 7   | Rate Select        | No connection required   | 4    |
| 8   | LOS                | Loss of Signal indication. Logic 0 indicates normal operation. | 5    |
| 9   | V <sub>EER</sub>   | Receiver Ground (Common with Transmitter Ground)               | 1    |
| 10  | V <sub>EER</sub>   | Receiver Ground (Common with Transmitter Ground)               | 1    |
| 11  | V <sub>EER</sub>   | Receiver Ground (Common with Transmitter Ground)               | 1    |
| 12  | RD-                | Receiver Inverted DATA out. AC Coupled                         |      |
| 13  | RD+                | Receiver Non-inverted DATA out. AC Coupled                     |      |
| 14  | V <sub>EER</sub>   | Receiver Ground (Common with Transmitter Ground)               | 1    |
| 15  | V <sub>CCR</sub>   | Receiver Power Supply  |      |
| 16  | V <sub>CCT</sub>   | Transmitter Power Supply                                       |      |
| 17  | V <sub>EET</sub>   | Transmitter Ground (Common with Receiver Ground)               | 1    |
| 18  | TD+                | Transmitter Non-Inverted DATA in. AC Coupled.                  |      |
| 19  | TD-                | Transmitter Inverted DATA in. AC Coupled.                      |      |
| 20  | V <sub>EET</sub>   | Transmitter Ground (Common with Receiver Ground)               | 1    |

### Notes:

1. Circuit ground is internally isolated from chassis ground.
2. Laser output disabled on TDIS >2.0V or open, enabled on TDIS <0.8V.
3. Should be pulled up with 4.7k - 10kohms on host board to a voltage between 2.0V and 3.6V. MOD\_DEF (0) pulls line low to indicate module is plugged in.
4. This is an optional input used to control the receiver bandwidth for compatibility with multiple data rates (most likely Fiber Channel 1x and 2x Rates). If implemented, the input will be internally pulled down with > 30kΩ resistor. The input states are:
  - ☒ Low (0 – 0.8V): Reduced Bandwidth
  - ☒ (>0.8, < 2.0V): Undefined
  - ☒ High (2.0 – 3.465V): Full Bandwidth
  - ☒ Open: Reduced Bandwidth
5. LOS is open collector output should be pulled up with 4.7k-10k ohms on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.



RoHS compliant  
 622Mb/s 1310nm Single-mode SFP Transceiver  
 SFP LC Duplex Connector (20km)  
 Up to 622Mb/s data links with DDM

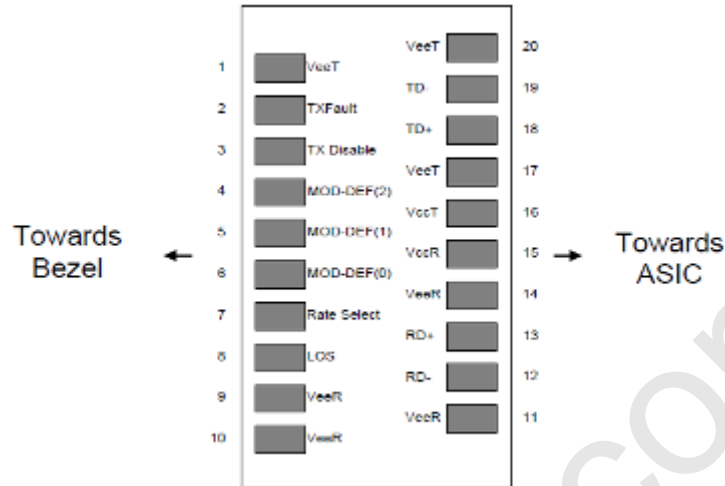


Figure2. Pin out of Connector Block on Host Board

## II. Absolute Maximum Ratings

| Parameter                 | Symbol | Min. | Typ. | Max.    | Unit | Note |
|---------------------------|--------|------|------|---------|------|------|
| Storage Temperature       | Ts     | -40  |      | 85      | °C   |      |
| Storage Ambient Humidity  | HA     | 5    |      | 95      | %    |      |
| Power Supply Voltage      | VCC    | -0.5 |      | 4       | V    |      |
| Signal Input Voltage      |        | -0.3 |      | Vcc+0.3 | V    |      |
| Receiver Damage Threshold |        | 5    |      |         | dBm  |      |

## III. Recommended Operating Conditions

| Parameter                    | Symbol | Min. | Typ.    | Max. | Unit  | Note            |
|------------------------------|--------|------|---------|------|-------|-----------------|
| Case Operating Temperature   | Tcase  | 0    |         | 70   | °C    |                 |
|                              |        | -10  |         | 80   |       |                 |
|                              |        | -40  |         | 85   |       |                 |
| Ambient Humidity             | HA     | 5    |         | 70   | %     | Non-condensing  |
| Power Supply Voltage         | VCC    | 3.13 | 3.3     | 3.47 | V     |                 |
| Power Supply Current         | ICC    |      |         | 280  | mA    |                 |
| Power Supply Noise Rejection |        |      |         | 100  | mVp-p | 100Hz to 1MHz   |
| Data Rate                    |        |      | 622/622 |      | Mbps  | TX Rate/RX Rate |



**RoHS compliant**  
**622Mb/s 1310nm Single-mode SFP Transceiver**  
**SFP LC Duplex Connector (20km)**  
**Up to 622Mb/s data links with DDM**


|                       |                   |  |  |    |    |             |
|-----------------------|-------------------|--|--|----|----|-------------|
| Transmission Distance |                   |  |  | 20 | KM |             |
| Coupled Fiber         | Single mode fiber |  |  |    |    | 9/125um SMF |

#### IV. Specification of Transmitter

| Parameter                         | Symbol                                     | Min. | Typ. | Max. | Unit | Note     |
|-----------------------------------|--|------|------|------|------|----------|
| Average Output Power              | $P_{OUT}$                                  | -7   |      | -3   | dBm  |          |
| Extinction Ratio                  | ER   | 8.2  |      |      | dB   |          |
| Center Wavelength                 | $\lambda_c$                                | 1270 | 1310 | 1360 | nm   | FP Laser |
| Spectrum Width (RMS)              | $\sigma$                                   |      |      | 3.5  | nm   |          |
| Transmitter OFF Output Power      | $P_{OFF}$                                  |      |      | -45  | dBm  |          |
| Differential Line Input Impedance | RIN  | 90   | 100  | 110  | Ohm  |          |
| Jitter (Peak-Peak)                | $t_j$                                      |      |      | 0.1  | UI   | Note (1) |
| Output Eye Mask                   | Compliant with G.957(class 1 laser safety) |      |      |      |      | Note (2) |

Note (1): Measured at 2<sup>23</sup>-1 NRZ PRBS pattern.

Note (2): Transmitter eye mask definition.

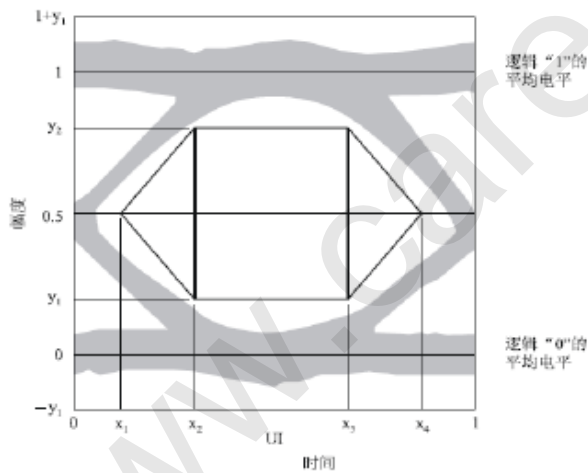

|           | STM-1     | STM-4     |
|-----------|-----------|-----------|
| $x_1/x_4$ | 0.15/0.85 | 0.25/0.75 |
| $x_2/x_3$ | 0.35/0.65 | 0.40/0.60 |
| $y_1/y_2$ | 0.20/0.80 | 0.20/0.80 |



**RoHS compliant**  
**622Mb/s 1310nm Single-mode SFP Transceiver**  
**SFP LC Duplex Connector (20km)**  
**Up to 622Mb/s data links with DDM**

## V. Specification of Receiver

| Parameter                         | Symbol         | Min. | Typ. | Max. | Unit | Note     |
|-----------------------------------|----------------|------|------|------|------|----------|
| Input Optical Wavelength          | $\lambda_{IN}$ | 1270 |      | 1610 | nm   |          |
| Receiver Sensitivity              | $P_{IN}$       |      |      | -28  | dBm  | Note (1) |
| Input Saturation Power (Overload) | $P_{SAT}$      | -8   |      |      | dBm  |          |
| Los Of Signal Assert              | $P_A$          | -38  |      |      | dBm  |          |
| Los Of Signal De-assert           | $P_D$          |      |      | -29  | dBm  | Note (2) |
| LOS Hysteresis                    | $P_A-P_D$      | 0.5  | 2    | 6    | dB   |          |

Note (1): Measured with Light source 1310nm, ER=8.2dB, BER =  $<10^{-12}$ @PRBS=2<sup>23</sup>-1 NRZ.

Note (2): When LOS de-asserted, the RX data+/- output is signal output.

## VI. Electrical Interface Characteristics

| Parameter                      | Symbol     | Min. | Typ. | Max.         | Unit | Note     |
|--------------------------------|------------|------|------|--------------|------|----------|
| <b>Transmitter</b>             |            |      |      |              |      |          |
| Total Supply Current           | $I_{CC}$   |      |      | A            | mA   | Note (1) |
| Transmitter Disable Input-High | $V_{DISH}$ | 2    |      | $V_{CC}+0.3$ | V    |          |
| Transmitter Disable Input-Low  | $V_{DISL}$ | 0    |      | 0.8          | V    |          |
| Transmitter Fault Input-High   | $V_{DISL}$ | 2    |      | $V_{CC}+0.3$ | V    |          |
| Transmitter Fault Input-Low    | $V_{TXFH}$ | 0    |      | 0.8          | V    |          |
| <b>Receiver</b>                |            |      |      |              |      |          |
| Total Supply Current           | $I_{CC}$   |      |      | B            | mA   | Note (1) |
| LOSS Output Voltage-High       | $V_{LOSH}$ | 2    |      | $V_{CC}+0.3$ | V    | LVTTTL   |
| LOSS Output Voltage-Low        | $V_{LOSL}$ | 0    |      | 0.8          | V    |          |

Note (1) A (TX) + B (RX) = 280mA (Not include termination circuit)

## VII. Digital Diagnostic Functions

Carelink CL-SFP-MR-31-20/622 DD transceivers support the 2-wire serial communication protocol as defined in the SFP MSA. It is very closely related to the E2PROM defined in the GBIC standard, with the same electrical specifications. The standard SFP serial ID provides access to identification information that describes the transceiver's capabilities, standard interfaces, manufacturer, and other information.

Additionally, Carelink SFP transceivers provide a unique enhanced digital diagnostic monitoring interface, which allows real-time access to device operating parameters such as transceiver temperature, laser bias current, transmitted optical power, received optical power and transceiver supply voltage. It also defines a sophisticated system of alarm and warning flags, which alerts end-users when particular operating parameters are outside of a factory set normal range.


The SFP MSA defines a 256-byte memory map in E2PROM that is accessible over a 2-wire serial interface at the 8 bit address 1010000X (A0h). The digital diagnostic monitoring interface makes use of the 8 bit address 1010001X (A2h), so the originally defined serial ID memory map remains unchanged. The interface is identical to, and is thus fully backward compatible with both the GBIC Specification and the SFP Multi Source Agreement. The operating and diagnostics information is monitored and reported by a Digital Diagnostics Transceiver Controller (DDTC) inside the transceiver, which is accessed through a 2-wire serial interface. When the serial protocol is activated, the serial clock



**RoHS compliant**  
**622Mb/s 1310nm Single-mode SFP Transceiver**  
**SFP LC Duplex Connector (20km)**  
**Up to 622Mb/s data links with DDM**

signal (SCL, Mod Def 1) is generated by the host. The positive edge clocks data into the SFP transceiver into those segments of the E2PROM that are not write-protected. The negative edge clocks data from the SFP transceiver. The serial data signal (SDA, Mod Def 2) is bi-directional for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end of serial protocol activation. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially. Digital diagnostics for the CL-SFP-MR-31-20/622 DD are internally calibrated by default.


### VIII. Recommend Circuit Schematic

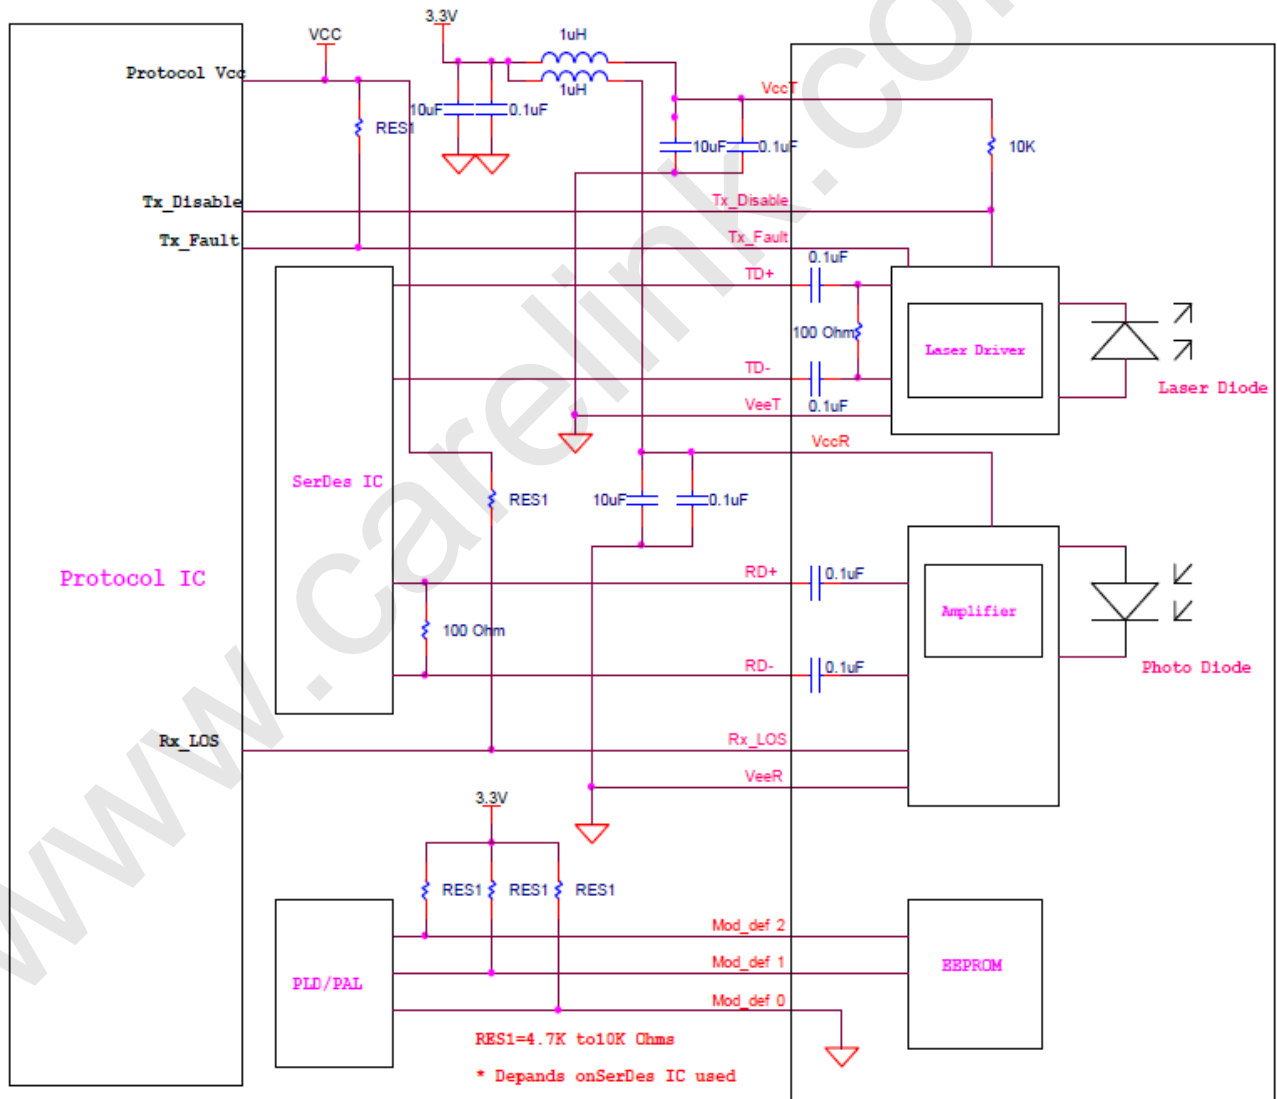



RoHS compliant  
 622Mb/s 1310nm Single-mode SFP Transceiver  
 SFP LC Duplex Connector (20km)  
 Up to 622Mb/s data links with DDM

## X. Mechanical Specifications (Unit: mm)

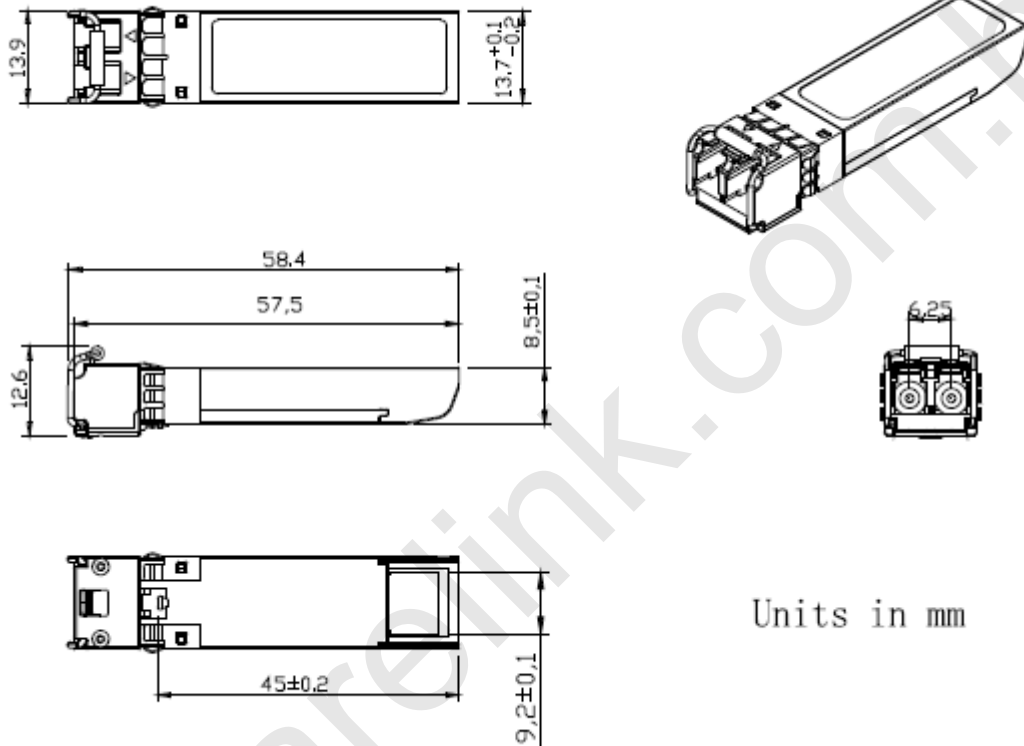

Units in mm

## IX. Regulatory Compliance

| Feature                            | Reference  | Performance               |
|------------------------------------|--|---------------------------|
| Electrostatic discharge (ESD)      | IEC/EN 61000-4-2                                 | Compatible with standards |
| Electromagnetic Interference (EMI) | FCC Part 15 Class B EN 55022 Class B (CISPR 22A) | Compatible with standards |
| Laser Eye Safety                   | FDA 21CFR 1040.10, 1040.11 IEC/EN 60825-1, 2     | Class 1 laser product     |
| Component Recognition              | IEC/EN 60950 , UL                                | Compatible with standards |
| ROHS                               | 2002/95/EC                                       | Compatible with standards |
| EMC                                | EN61000-3  | Compatible with standards |